

SCHEMA TECNICA / TECHNICAL DATA SHEET 2024

MODELLO - MODEL

Codice - Code	Modello - Model	Type	Applicazione - Application
-	SCR012	SC	TN - NT

Monoblocco Accavallato Ridotto, Centralina elettronica di controllo, Tipo di espansione mediante tubo capillare, Cavo resistenza porta (sui modelli in bassa temperatura), Cavo luce cella, Pressostato di minima a taratura fissa., Scarico acqua di condensa a perdere, Compressore ermetico, Sbrinamento a gas caldo, Filtro sulla linea di liquido, Predisposizione per collegamento microporta.

Wall mounted SLIM Monoblock, Electronic control unit, Type of expansion by thermostatic valve, Door heating cable (on low temperature models), Romm light cable, Minimum and maximum pressure switch with fixed setting., Condensate water discharge to lose, Hermetic compressor , Hot gas defrost, Filter on the liquid line, Remote control panel connected to the unit with a 5m cable, Predisposition for micro-door connection.

DATI TECNICI - TECHNICAL DATA

Gas - Refrigerating Gas	R290
Tensione - Voltage	230/1/50
Tipo Compressore - Compressor Type	E
Cilindrata - Displacement	2,1
Potenza Assorbita Max (W) Power Absorption Max (W)	730
Tipo Sbrinamento - Defrost Type	GC
Ventole Condensatore (mm) Condenser fans (mm)	1x254
Portata aria condensatore (mc/h) Condenser air flow (mc/h)	1050
Ventole Evaporatore Nr x D (mm) Fans Evaporator Nr x D (mm)	1X200
Portata aria evaporatore (mc/h) Evaporator air flow (mc/h)	550
Freccia Aria (mt) - Air Arrow (mt)	m.5
Marca - Brande	Sicaf



RESE - POWER RATE

T EXT	T C	P watt	V60 mm	V80 mm	V100 mm
25	5	1341	16.1	18	19.7
	0	1140	10.8	12.8	13.8
	-5	960	6.3	7.2	7.8
32	5	1248	10.4	11.8	13.3
	0	1049	7	8	9.1
	-5	883	4.2	4.8	5.5
40	5	1126	6.4	7.2	7.8
	0	959	4.3	4.9	5.8
	-5	809	2.5	2.8	3.5

Nota/Note: Rif. EN12900 - SSH 20°C - SUB 0°K

Condizioni di Calcolo / Operating Conditions # Prodotto - Product : Carne / Meat # Stock 250 kg/mc # 10% Mov.


Temperatura Ingresso /Product Inlet Temperature: 10/15 °C #Tempo Funzionamento /Process time: 16 ore

SCHEDA TECNICA / TECHNICAL DATA SHEET 2024


MODELLO - MODEL

Codice - Code	Modello - Model	Type	Applicazione - Application
-	SCR012	SC	TN - NT




DIMENSIONI - DIMENSIONS

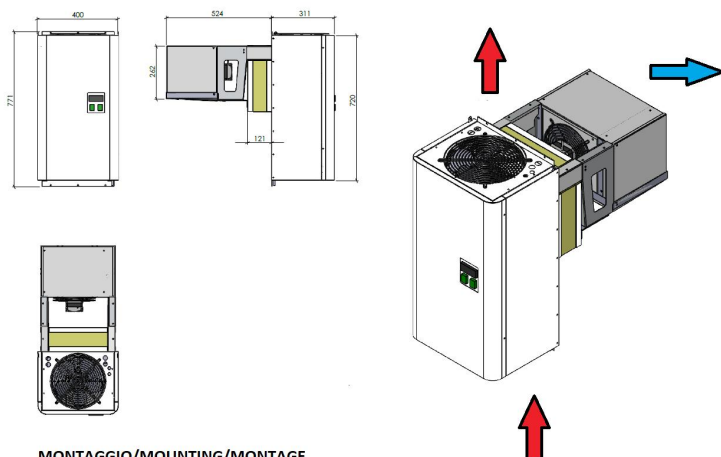

MONTAGGIO/MOUNTING/MONTAGE

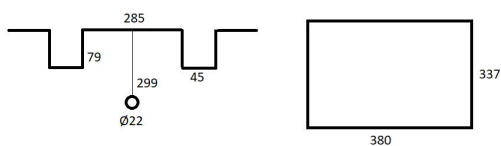

Type	1
L (mm)	402
P (mm)	839
H (mm)	771
Peso (kg) - Weight (kg)	49
P Imballo (mm) - P Paking (mm)	920
L Imballo (mm) - L Paking (mm)	480
H Imballo (mm) - H Paking (mm)	930
Peso Lordo (Kg) - Gross Weight (Kg)	66



SCHEMA TECNICA / TECHNICAL DATA SHEET 2024

MODELLO - MODEL

Codice - Code	Modello - Model	Type	Applicazione - Application
-	SCR012	SC	TN - NT

KIT E ACCESSORI - KIT AND OPTIONALS

Cod. KIT TSC Mod. Kit Tampone a parte - Loose Panel Kit - Separate Tamponkit

Cod. PST MAX Mod. Pressostato - Pressostat - Hochdruckschalter HP

Cod. PST CND Mod. Pressostato Ventola Condensatore - Cond Fan Pressostat - Kond. Druckregelung Druckschalter

Cod. FRS CSC Mod. Protezione Cataforesi Condensatore -Corrosion Protection Condenser - Korrosionsschutz Kondensator

Cod. FRS ESC Mod. Protezione Cataforesi Evaporatore - Corrosion Protection Evaporator - Korrosionsschutz Verdampfer

Cod. Mod.

Cod. RES CAR Mod. Resistenza Carter - Crankcase Heater - Oelsumpfheizung