

Single bossed clamps

with DÄMMGULAST® red, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes as well as for thermal oil pipes
- Attachment of pipelines in increased temperature ranges
- For indoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- With high-temperature resistant DÄMMGULAST® Vibration control lining red


- The high-quality DÄMMGULAST® section maintains its properties in the temperature range -60 °C to +200 °C
- Average sound level improvement up to 24 dB(A)
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



Features



Size	Max. recommended load [N]
3/8" - 2"	1,300
70 - 83 mm	1,900
3" - 4"	2,200
125 mm - 6"	2,700
170 - 200 mm	3,500
212 mm - 8"	5,300

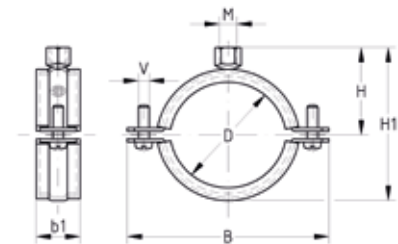

Connecting thread	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit	
	[inch]	[mm]		b1	B	H	H1	V				
M	M8/M10	3/8"	14 - 20	23	64	35.5	55	M6 x 20	151532	100	Pieces	
		1/2"	21 - 26		71	38.5	61		151533			
		3/4"	26 - 30		75	40.5	65		151534			
		1"	31 - 38		81	43.5	71		151535			
		1 1/4"	40 - 47		91	48.5	81		151537			
		1 1/2"	48 - 54		100	52.5	89		151538			
	M8/M10	57	54 - 60	28	105	55	94	M6 x 25	151539	50	Pieces	
			60 - 66		111	58	100		151540			
			68 - 73		126	62.5	109		M8 x 35			151542
			73 - 80		131	65	114					151543
			82 - 87		142	70	124					151544
			87 - 94		146	72	128		M8 x 40			151545

⚠ Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

Single bossed clamps with DÄMMGULAST® red, galvanised

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M8/M10		102	99 - 104	28	157	77.5	139	M8 x 40	151546	50	Pieces
		110	105 - 112		166	82	148		151547		
	4"	112 - 118	172		85	154	151548				
	125	122 - 128	182		90	164	151549				
	133	132 - 137	191		94.5	173	151550				
	5"	137 - 142	196		97	178	151551				
	144	142 - 148	202		100	184	151552				
	150	149 - 156	210		104	192	151553				
	160	159 - 164	218		108	200	151554				
	6"	164 - 169	223		110.5	205	151555				
M10/M12	1"		31 - 38	23	81	48.5	76	M6 x 25	151560	100	
		1¼"	40 - 47		91	53.5	86		151562		
	1½"	48 - 54	100		57.5	94	151563				
	57	54 - 60	105		60	99	151564				
	2"	60 - 66	111		63	105	151565				
	70	68 - 73	28		126	67.5	114		M8 x 35	151567	
	2½"	73 - 80		131	70	119	151568				
	83	82 - 87		142	75	129	151569				
	3"	87 - 94		146	77	133	M8 x 40	151570			
	102	99 - 104		157	82.5	144		151571			
	110	105 - 112		166	87	153		151572			
	4"	112 - 118	172	90	159	151573					
	125	122 - 128	182	95	169	151574					
	133	132 - 137	191	99.5	178	151575					
	5"	137 - 142	196	102	183	151576					
		144	142 - 148	202	105	189	151577				
		150	149 - 156	210	109	197	151578				
		160	159 - 164	218	113	205	151579				
		6"	164 - 169	223	115.5	210	151580				
			170	169 - 172	225	116.5	212	151581			
	180		177 - 183	235	122	223	151582				
	200		197 - 203	256	132	243	151583				
	212		208 - 214	46	284	138.5	256	M10 x 40	151584		
	8"		217 - 225		295	144	267		151585		



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.