


Product Code

**DI308N/4**

Filter Drier with Moisture Indicator  
1/2" Flare  
PS = 50 bar - 680 PSI

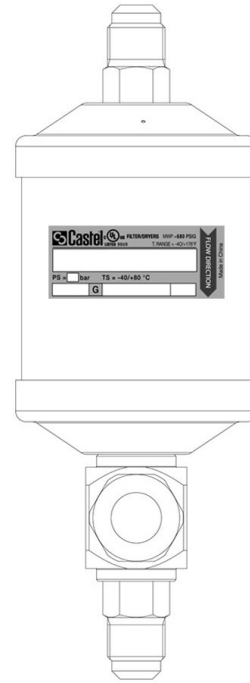

### Product use

These are filter dryers for the liquid line with a moisture indicator, brazed directly onto the outlet of the filter.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

### Product Details

International code 084

Connections SAE Flare 1/2"

Nominal volume [cm<sup>3</sup>] 130

PS [bar] 50

MWP [psi] (1) 680

TS [°C] min. -40

TS [°C] max. +80

Package pcs 15

### Notes where expressly stated

(1): according to UL approval

*Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.*

*Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.*