


Product Code

**DI305N/2S**

Filter Drier with Moisture Indicator  
1/4"ODS

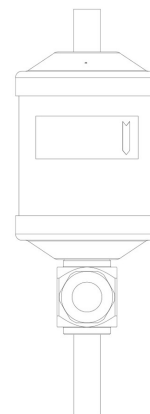

**POLYHEDRA**

### Product use

These are filter dryers for the liquid line with a moisture indicator, brazed directly onto the outlet of the filter. Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134a, R32, R404A, R407C, R410A, R507)
- HFO and HFO/HFC blends (R1234ze, R1234yf, R448A, R449A, R450A, R452A, R452B, R454B, R513A)
- HC (R290, R600, R600a, R1270)

Maximum allowable pressure PS = 45 bar.

Allowable temperatures TS = -40 / +80 °C

### Product details

International code 052S

Connections ODS Ø [in.] 1/4"

Connections ODS Ø [mm] -

Nominal volume [cm<sup>3</sup>] 80

PS[bar] 50 (1)

TS[°C] Min -40

TS[°C] Max +80

Package pcs 15

### Notes

(1): MWP = 680 psi according to UL approval