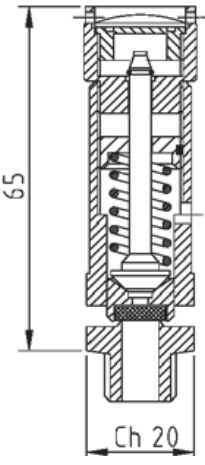
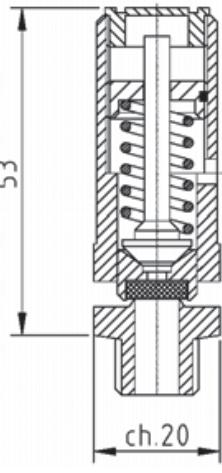


SCARICO LIBERO / FREE OUTLET

 <p>D7 kg. 0,13</p>	Tipo: / Type:	D7	do: 7 mm		
	Omologazione Homologation	PN	Coefficiente efflusso ridotto Low flow coefficient	Campo di taratura Setting range	
	E.D. 2014/68/UE IV^A Cat.(PED)	60	0,81	0,3 - 60,0 bar	
	EAC	60	0,81	0,3 - 60,0 bar	
	ATEX Ex h II 2 G (I)	60	0,81	0,3 - 60,0 bar	
	ATEX Ex h II 2 D	/	/	/	
	ASME VIII Div.I	60	0,712	1,0 - 60,0 bar	
	Canadian Reg. CRN	60	0,712	1,0 - 60,0 bar	
 <p>D7/S kg. 0,10</p>	CONFIGURAZIONE - CONFIGURATION				
	Materiale / Material	Ottone / Brass	Mista Ottone - Acciaio inox Mixed Brass - Stainless steel	Acciaio inox Stainless steel	
	Modelli / Model	Con ghiera With ring nut	/	/	Con ghiera Without ring nut
		Senza ghiera Without ring nut	/	/	Senza ghiera Without ring nut
		Con anellino With ring	/	/	Con anellino With ring
		/	/	/	/
/		/	/	/	
Sedi di Tenuta Seal System	N.B.R. (Std) - 10 / +100 °C	/	/	N.B.R. (Std) - 10 / +100 °C	
	E.P.D.M. - 50 / +150 °C	/	/	E.P.D.M. - 50 / +150 °C	
	VITON - 20 / +200 °C	/	/	VITON - 20 / +200 °C	
	SILICONE - 60 / +200 °C	/	/	SILICONE - 60 / +200 °C	
	PTFE - 196 / +250 °C	/	/	PTFE - 196 / +250 °C	
	KALREZ - 20 / +250 °C	/	/	KALREZ - 20 / +275 °C	
	/	/	/	/	
Connessione Entrata Inlet Connection	G.1/4" - 3/8" ISO228	/	/	G.1/4" - 3/8" ISO228	
	R.1/4" - 3/8" EN10226	/	/	R.1/4" - 3/8" EN10226	
	1/4" - 3/8" NPT	/	/	1/4" - 3/8" NPT	
	/	/	/	/	
	/	/	/	/	
Connessione Uscita Outlet Connection	/	/	/	/	
	/	/	/	/	
	/	/	/	/	
	/	/	/	/	
	/	/	/	/	
	/	/	/	/	

A richiesta possono essere eseguiti collaudi dai più prestigiosi enti quali: INAIL (area ISPEL), TÜV, RINA, Bureau Veritas, ABS e Lloyd Register.
On request tests can be made by the most prestigious societies, such as: INAIL (area ISPEL), TÜV, RINA, Bureau Veritas, ABS and Lloyd Register.

Note: (I) No Modello Con protezione / No Model With Protection