

## APPLICATIONS



Air Conditioning

## MAX. RECOMM. HEIGHT

6 m  
↑




### Sanicondens Clim mini S

Barcode :  
EAN 3308815083520  
CLIMMINI3S



### Sanicondens Clim pack S (with white trunking)

Barcode  
EAN 3308815083919  
CLIMPACK3SBL



## Sanicondens Clim mini S

The new scaled down generation of pump for wall air conditioners, designed to meet market requirements and is now equipped with the best features !




NEW

Alarm system (thermal protection 130°C, overflow alarm contact).  
Control unit has transparent base.

Quiet operation : 21 dB(A) only !

A compact pump for hidden installation

### OPERATING DIAGRAM

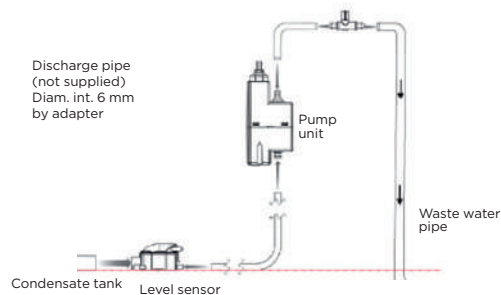

Pump, detection unit, trunking (only for Sanicondens Clim pack S)

1.2 m flexible hose, mounting bracket, vent tube, power cable supplied

### TECHNICAL FEATURES

Low noise level	21 dB(A)
Possible connections	Air conditioners up to 8 kW / 27 000 BTU
Ø int. inlet	16 mm
Ø int. discharge pipework	6 mm
Maximum flow	9 l/h +/- 15%
Maximum incoming water temperature	35 °C
Maximum suction lift between the detection unit and the pump)	2 m
Voltage	220-240 V
Supply frequency	50 Hz
Max power	22 W
IP rating index	IP20

### DIMENSIONS - PUMP CURVE

