

APPLICATIONS



Boiler



Air conditioning



Air conditioner unit with ceiling cassette



Refrigerated display case



Dehumidifier

PUMPING DISTANCE

4,5 m
50 m

WARRANTY



Product code :
EAN 3308815083674
SK6



NEW
2021

Sanicondens® Pro v02



Flexibility: can be used with gas or oil boilers (using Sanineutral or Sanineutral mini) floor and wall boilers, air conditioning units, dehumidifiers, refrigerated display cases.

Easy installation:


Complete installation kit supplied with non-return valve and alarm pre-connection.

Compact design


Quiet operation



SEMI-TRANSPARENT VIEW

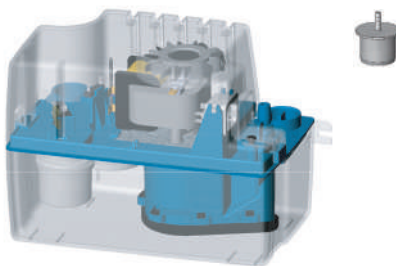

PUMP CURVE

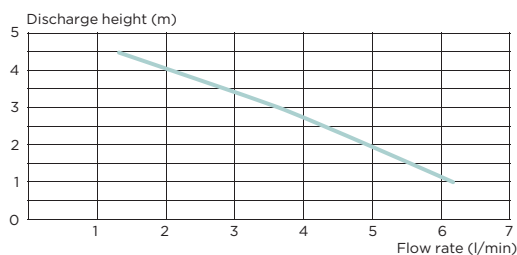

PACKAGING

Sanicondens® Pro v02

Check valve supplied

Comes with: fixing screw, 1 inlet adapter, 1 outlet adapter (50mm), 1 drain hose (5m) and 1 power cable of 1.5m, 1 rubber stopper, 1 alarm pre-connection cable

TECHNICAL FEATURES

Ø inlet	28 mm
Number of possible inlet	2
Ø discharge pipework	10 mm
Tank volume	2,2l
Maximum flow	6,2 l/min
Maximum incoming water temperature	80°C (S3 15 %)
Max power of gas boiler	50 kW
Max power of oil boiler	30 kW
Voltage	220-240 V
Supply frequency	50 Hz
Max power	60 W
Max current	0,52 A
Electrical class	I
IP rating	IP20
Weight	2 kg
Low level noise	< 45 dB(A)

ORIGINE
FRANCE®
GARANTIE

BVCert. 6045364

