


Series P20

Pressure Controls for Refrigeration, Air-conditioning and Heat-pump Applications

Introduction

The P20 series high and low limit (cut-out) controls for all non-corrosive refrigerants are compact pressure controls ideally suited for commercial or residential packaged air conditioning units, heat pumps, small water chillers, ice cube machines and other applications where a semi fixed setting is acceptable or required and where mounting space is limited. The P20 series includes auto reset as well as manual reset models and is factory set. A special setting tool is available while also field (screwdriver) adjustable models can be chosen.

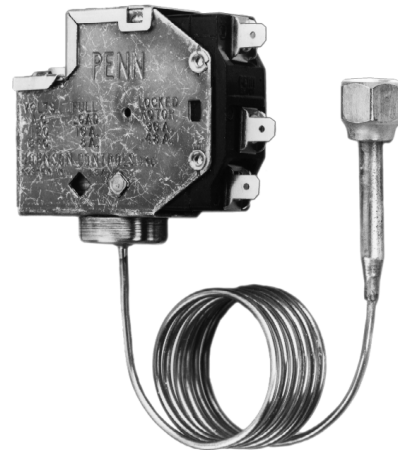

P20 Pressure Control

Feature and Benefits

<input type="checkbox"/> Field proven reliability.	More than half a million in use today.
<input type="checkbox"/> Reset tab must be released before restart. (Trip free manual reset).	Override of control function is not possible.
<input type="checkbox"/> Compact design.	Less cabinet space needed.
<input type="checkbox"/> Enclosed dust-tight switch.	Prevents contacts pollution.
<input type="checkbox"/> SPDT contact with special terminals.	Can be used either as quick or as screw terminals.
<input type="checkbox"/> Test pressure 53 bar.	Test strength far above severe operating and standby conditions.
<input type="checkbox"/> Designed for at least 300000 cycles.	Accurate repeatability and long life.

Note

These controls are designed for use only as operating controls. Where an operating control failure would result in personal injury or loss of property it is the responsibility of the installer to add devices or systems that protect against, or warn of, control failure.

Description

The P20 series are available in three categories (see type number selection table) :

- 1) **Universal replacement models.** These are field (screwdriver) adjustable, individually packed and can be purchased in any quantity.
- 2) **Basic models.** These are factory set but can be adjusted by use of a special wrench (see accessories). They can be purchased in bulkpack of 50 pcs each.
- 3) **Special (OEM) models.** For yearly order quantities above 1000 pcs these models can have optional constructions like:
 - screwdriver adjustment
 - 120 cm capillary
 - range -0.6 to 7 bar
 - range 14 to 42 bar
 - other pressure connection style

The minimum shipping quantity from factory is 250 pieces per model (10 boxes). Please contact your Johnson Controls representative.

Installation

The P20 controls can be installed in any convenient location provided that the ambient conditions are suitable for the IP00 enclosure, within the specified limits regarding temperature and humidity and normal pollution situation. Each control is provided with 2 mounting screws (6-32UNC x 4.5 mm thread). For easy mounting different types of mounting brackets are available (see accessories).

Adjustment


All models are factory set. The universal replacement models can be field adjusted by use of a screwdriver. For adjustment of the basic models a special wrench is needed (see accessories). The differential is not adjustable but can be selected from the "Differential Specifications" matrices (see page 4).

Range

The indicated range means from the "minimal low switchpoint" up to the maximum "high switch point". This means that the "differential" cannot be at the outside of the indicated range.

Contact functions


Low Pressure version



1 - 2 open on pressure decrease

Fig.1

High Pressure version



1 - 2 open on pressure increase

Fig. 2

Accessories (see page 6 and 7).

- The following accessories are available:
- Adjusting wrench WRN12-1 for adjustment of all models. (Fig. 8)
 - Clip-on terminal cover. (Fig. 9)
 - Mounting plate BKT116-1 for single P20. (Fig. 10)
 - Mounting bracket 210-25R for single P20, angled version. (Fig. 11)
 - Mounting bracket BKT275-1 for two P20 controls, angled version. (Fig. 12)

Type number selection

In the model number the following information is given:
9650K


E = Auto reset
F = Manual reset low pressure types
G = Manual reset high pressure types

A = Basic models (only adjustable with special wrench)
B = Universal replacement models (field (screwdriver) adjustable types)

Pressure connection style (see page 6)

1 = style 45A
5 = style 50, 51 or customer special
6 = style 13
9 = style 34

Pressure differential. This is indicated in the "Differential Specification" matrices (see page 4). The differential code is indicated by two characters. Each differential code compares with a digit as indicated below.

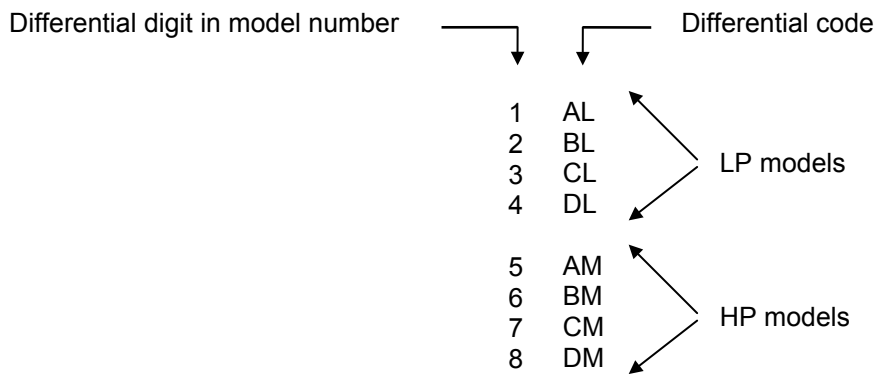

This is the model number suffix that indicates the selected switch point (see "Differential Specification" matrices, page 4 - horizontal line). The figures given at the intersection of this horizontal line and the selected differential column indicates the pressure differential that belongs to the selected switch point. The model suffix is indicated in the "Differential Specification" matrices (see page 4).

The above mentioned model P20EA-9650K indicates:

- Auto reset
- Basic model (special adjustment tool WRN12-1 needed)
- Connection style 13
- Differential AM equals 1.2 bar
- High switch point 16 bar.

P20EA-

Differential specification matrix for LP models, values in bar.

Low switch point	Differential code				Model suffix
	AL (1)	BL (2)	CL (3)	DL (4)	
0.5	0.9	1.5	2.0	2.6	A
1	0.9	1.5	2.0	2.6	B
1.5	0.9	1.5	2.0	2.7	C
2	0.9	1.5	2.1	2.7	D
2.5	0.9	1.5	2.1	2.8	E
3	0.9	1.5	2.1	2.8	F
3.5	0.9	1.5	2.1	2.8	G
4	0.9	1.5	2.1	2.9	H
4.5	0.9	1.5	2.1	2.9	K
5	0.9	1.5	2.1	3.0	L
5.5	1.0	1.6	2.2	3.0	M
6	1.0	1.6	2.2	3.0	N
6.5	1.0	1.6	2.2	3.1	P
7	1.0	1.6	2.2	3.1	Q
7.5	1.0	1.6	2.2	X	R
8	1.0	1.6	X	X	S

Differential specification matrix for HP models, values in bar.

High switch point	Differential code				Model suffix
	AM (5)	BM (6)	CM (7)	DM (8)	
8	1.0	X	X	X	A
9	1.1	X	X	X	B
10	1.1	2.8	X	X	C
11	1.1	2.8	4.2	X	D
12	1.1	2.9	4.3	X	E
13	1.2	2.9	4.3	6.1	F
14	1.2	2.9	4.4	6.2	G
15	1.2	3.0	4.4	6.3	H
16	1.2	3.1	4.5	6.4	K
17	1.2	3.1	4.6	6.5	L
18	1.3	3.1	4.6	6.5	M
19	1.3	3.1	4.7	6.6	N
20	1.3	3.2	4.7	6.7	P
21	1.3	3.2	4.8	6.8	Q
22	1.3	3.3	4.9	6.9	R
23	1.4	3.3	4.9	7.0	S
24	1.4	3.3	5.0	7.1	T
25	1.4	3.4	5.0	7.2	U
26	1.4	3.4	5.1	7.3	V
27	1.4	3.5	5.2	7.4	W
28	1.5	3.5	5.2	7.5	X
29	1.5	3.5	5.2	7.6	Y

Differential tolerances*:

AL ± 50 %	CL ± 26 %
BL ± 34 %	DL ± 20 %
AM ± 30 %	CM ± 21 %
BM ± 24 %	DM ± 18 %

* But not less than 0.4 bar.

Switch point tolerances LP models ± 3 % but not less than 0.2 bar.

Switch point tolerances HP models ± 2 % but not less than 0.4 bar.

T Type number selection table

Universal replacement models

Range(*) (bar)	Differential code	Pressure connector	Contact function	Factory set at	Max. working pressure	Order number
0.5 - 10	CL	style 50	Fig. 1	3 bar	13 bar	P20EB-9530F
0.5 - 10	CL	style 13	Fig. 1	3 bar	13 bar	P20EB-9630F
7 - 29	CM	style 51	Fig. 2	28 bar	38 bar	P20EB-9570X
7 - 29	CM	style 13	Fig. 2	28 bar	38 bar	P20EB-9670X
0.5 - 10	man. reset ⁽¹⁾	style 50	Fig. 1	3 bar	13 bar	P20FB-9510F
0.5 - 10	man. reset ⁽¹⁾	style 13	Fig. 1	3 bar	13 bar	P20FB-9610F
7 - 29	man. reset ⁽²⁾	style 50	Fig. 2	28 bar	38 bar	P20GB-9550X
7 - 29	man. reset ⁽²⁾	style 13	Fig. 2	28 bar	38 bar	P20GB-9650X

Low pressure, auto reset models

0.5 - 10	AL	style 13	Fig. 1	(**)	13 bar	P20EA-9610 (**)
0.5 - 10	BL	style 45A	Fig. 1	(**)	13 bar	P20EA-9120 (**)
0.5 - 10	BL	style 13	Fig. 1	(**)	13 bar	P20EA-9620 (**)
0.5 - 10	CL	style 45A	Fig. 1	(**)	13 bar	P20EA-9130 (**)
0.5 - 10	CL	style 13	Fig. 1	(**)	13 bar	P20EA-9630 (**)
0.5 - 10	DL	style 13	Fig. 1	(**)	13 bar	P20EA-9640 (**)
0.5 - 10	AL	style 34	Fig. 1	(**)	13 bar	P20EA-9910 (**)
0.5 - 10	BL	style 34	Fig. 1	(**)	13 bar	P20EA-9920 (**)
0.5 - 10	CL	style 34	Fig. 1	(**)	13 bar	P20EA-9930 (**)
0.5 - 10	DL	style 34	Fig. 1	(**)	13 bar	P20EA-9940 (**)

Low pressure, manual reset models

0.5 - 10	man. reset ⁽¹⁾	style 13	Fig. 1	(**)	13 bar	P20FA-9610 (**)
----------	---------------------------	----------	--------	------	--------	-----------------

High pressure, auto reset models

7 - 29	AM	style 13	Fig. 2	(**)	38 bar	P20EA-9650(**)
7 - 29	BM	style 45A	Fig. 2	(**)	38 bar	P20EA-9160(**)
7 - 29	BM	style 13	Fig. 2	(**)	38 bar	P20EA-9660(**)
7 - 29	CM	style 45A	Fig. 2	(**)	38 bar	P20EA-9170(**)
7 - 29	CM	style 13	Fig. 2	(**)	38 bar	P20EA-9670(**)
7 - 29	DM	style 13	Fig. 2	(**)	38 bar	P20EA-9680(**)
7 - 29	AM	style 34	Fig. 2	(**)	38 bar	P20EA-9950(**)
7 - 29	BM	style 34	Fig. 2	(**)	38 bar	P20EA-9960(**)
7 - 29	CM	style 34	Fig. 2	(**)	38 bar	P20EA-9970(**)
7 - 29	DM	style 34	Fig. 2	(**)	38 bar	P20EA-9980(**)

High pressure, manual reset models

7 - 29	man. reset ⁽²⁾	style 45A	Fig. 2	(**)	38 bar	P20GA-9150(**)
7 - 29	man. reset ⁽²⁾	style 50	Fig. 2	(**)	38 bar	P20GA-9550(**)
7 - 29	man. reset ⁽²⁾	style 13	Fig. 2	(**)	38 bar	P20GA-9650(**)
7 - 29	man. reset ⁽²⁾	style 34	Fig. 2	(**)	38 bar	P20GA-9950(**)

(*) Minimum low switch point to maximum high switch point.

(1) Reset possible ≥ 3 bar above low switch point

(2) Reset possible ≥ 7 bar below high switch point.

() When ordering specify setting by adding the model suffix.**

Repair and replacement

Repair is not possible. In case of an improperly functioning control, please check with your nearest supplier. When contacting the supplier

for a replacement you should state the type/model number of the control. This number can be found on the data plate

Pressure connections




Fig. 3

Style 34




Fig. 4

Style 45A (incl. valve depressor mounted into capillary flare section)




Fig. 5

Style 13 (without valve depressor)




Fig. 6

Style 50 (incl. valve depressor mounted into machined flare)




Fig. 7

Style 51 (machined flare excl. valve depressor)

1. 90 cm capillary.
2. 7/16 - 20 UNF flare nut.
- 2a. 1/4" tube ODM for braze connection.
3. copper seal ring

Accessories (optional, has to be ordered separately)




Fig. 8
Adjusting wrench
WRN12-1




Fig. 9
Clip-on Bakelite terminal
cover 210-604R




Fig. 10
Mounting plate BKT116-1
(single)
1. mounting holes
for P20 Ø 4mm

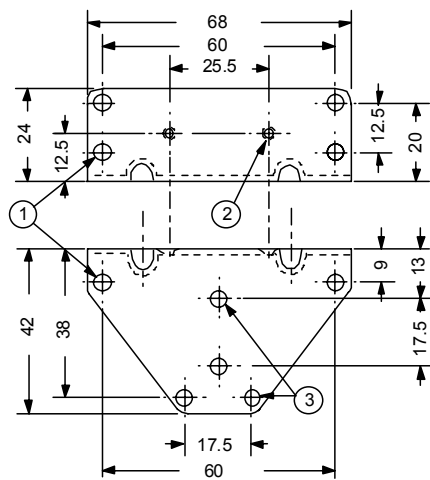


Fig. 11
Mounting bracket 210-25R (single)


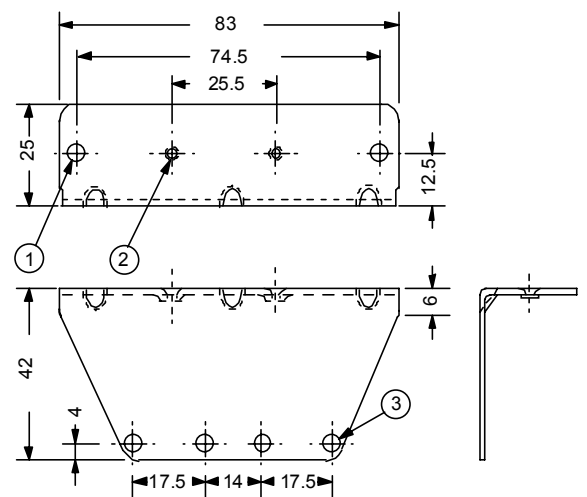


Fig. 12
Mounting bracket BKT275-1 (dual)

- 1 Mounting holes \varnothing 4 mm
- 2 Extruded holes 8 - 32 UNC thread
- 3 Mounting holes for P20 \varnothing 4 mm

Dimensions (mm)

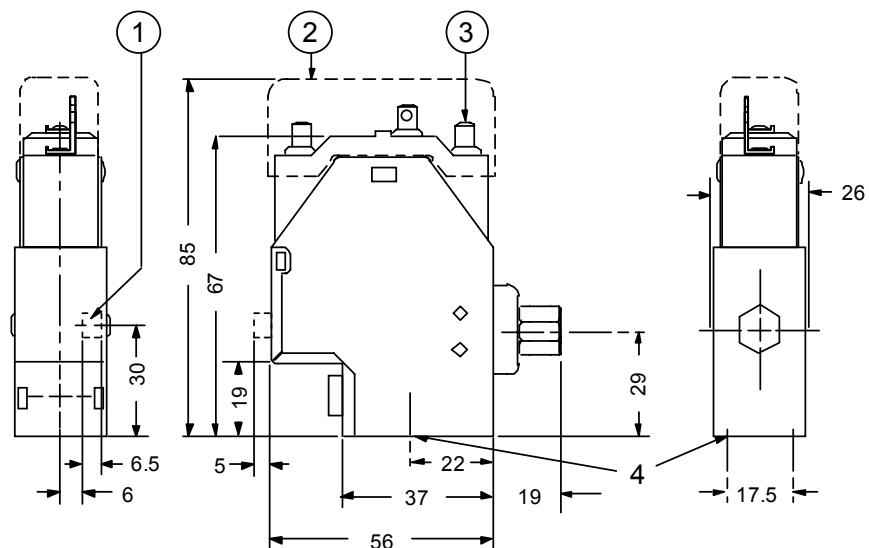

- 1 Reset lever, for manual reset models only
- 2 Height of control if 210-604R is used.
- 3 Terminals can be used as quickconnectors (6.3 mm) as well as screw connections.
- 4 2 Mounting holes 6 - 32 UNC thread (2 screws 6-32UNC x 4,5 mm provided with each control).

Fig. 13

Specifications

Type number	See type number selection table (page 5)	
Operating range	LP models	0.5 - 10 bar
	HP models	7 - 29 bar
Pressure connections	90 cm capillary, styles 13, 34, 45A,50 and 51	
Switch points and differentials	See "Differential specification" matrices (page 4)	
Adjustment	Wrench or screwdriver adjustment	
Maximum ambient temp.	+60 °C	
Minimum ambient temp.	-35°C	
Ambient humidity	10 to 95% RH (non-condensing)	
Test pressure	53 bar max.	
Minimum burst pressure	207 bar	
Protection class	IP00	
Electrical rating	15(8)A 230 V ac	
Contact	SPDT snap-acting switch	
Wiring connections	Screw terminals 1 up till 2.5 mm ² . Quick connector type 6.3 mm	
Material case	Cold rolled steel, zinc plated with dichromate dip	
capillary	Copper	
Packaging	50 controls per box	
Shipping weight	15 kg per box	
Dimensions	See dimension drawing	

Note: 1 bar = 100 kPa ≈ 14.5 psi.

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office or representative. Johnson Controls shall not be liable for damages resulting from misapplication or misuse of its products.

JOHNSON
CONTROLS

Dystrybutor

ZTCh[®]

ZTCh[®] - Zakład Techniki Chłodniczej

85-861 Bydgoszcz ul. Glinki 144
tel. (052) 3450 430, 34 50 432
fax (052) 3450 630
e-mail: ztch @ ztch.pl
http:// www.ztch.pl