




LABEL :

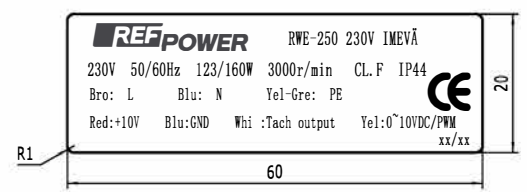

FLOW RATE CURVE :

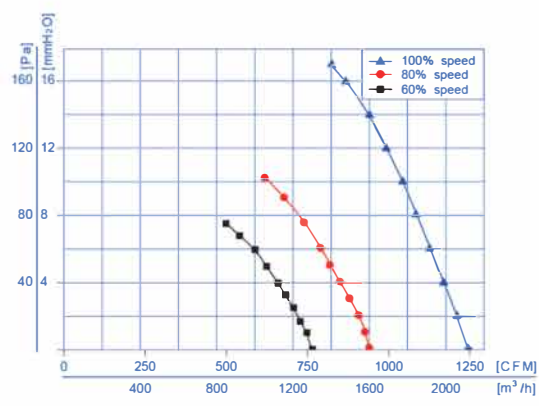

UNIT	Axial fan motor
MOTOR	Three phases motor
MOTOR TYPE	RWE-250 230V IMEVÄ
VOLTAGE (V)	230
FREQUENCY (Hz)	50/60
INPUT POWER (W)	160
CURRENT (A)	≤1.2
SPEED (r/min)	3000
AIR FLOW (m³/h)	2100
NOISE (dBA)	79
ROTATION	CW ,seen on rotor of motor
INSULATION CLASS	F
MOTOR PROTECTION	Undervoltage protection Overvoltage protection Overcurrent protection Locked rotor protection Automatic restart capability Soft start
PROTECTION CLASS	IP44
OPERATING TYPE	S1
AMBIENT TEMPERATURE	-25°C +60°C
BEARINGS	Ball bearings
MOUNTING TYPE	Horizontal or Vertical
NET WEIGHT/GROSS WEIGHT	3.9/4.2kg
PACKING	29*29*16cm

						SIGN	DATE	TITLE RWE-250 230V IMEVÄ
						DRN. BY		
						CHD. BY		PROJECTION  A4 SCALE SHEET: of
REV.	DESCRIPTION	APPROVED	DATE			ENG. BY		
						APP. BY		