




LABEL :

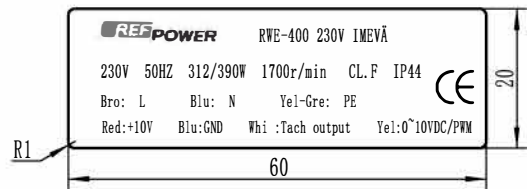


WIRING DIAGRIM :

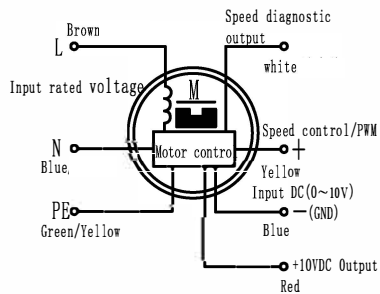

FLOW RATE CURVE :

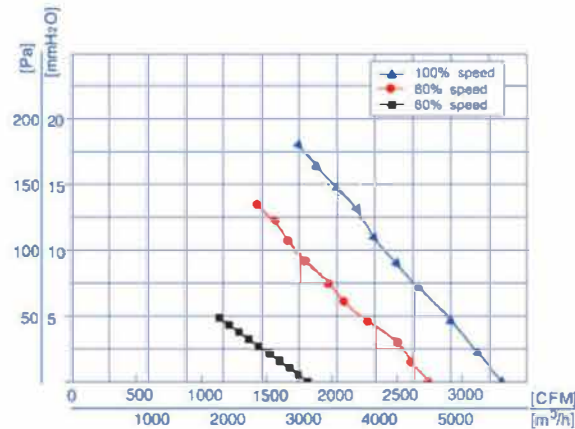

UNIT	Axial fan motor
MOTOR	Three phases motor
MOTOR TYPE	RWE-400 230V IMEVÄ
VOLTAGE (V)	230
FREQUENCY (Hz)	50/60
INPUT POWER (W)	390
CURRENT (A)	≤2.5
SPEED (r/min)	1700
AIR FLOW (m³/h)	5500
NOISE (dBA)	64
ROTATION	CCW ,seen on rotor of motor
INSULATION CLASS	F
MOTOR PROTECTION	Undervoltage protection Overvoltage protection Overcurrent protection Locked rotor protection Automatic restart capability Soft start
PROTECTION CLASS	IP44
OPERATING TYPE	S1
AMBIENT TEMPERATURE	-25° C +70° C
BEARINGS	Bali bearings
MOUNTING TYPE	Horizontal or Vertical
NET WEIGHT/GROSS WEIGHT	6.9/7.4kg
PACKING	44*44*21cm

						SIGN	DATE	TITLE
						DRN. BY		RWE-400 230V IMEV
						CHD. BY		PROJECTION  A3
						ENG. BY		
REV.	DESCRIPTION	APPROVED	DATE			APP. BY		SHEET: of