

APPLICATIONS



Boiler



Dehumidifier

PUMPING DISTANCE

4.5 m



WARRANTY



Product Code:

SK6N

Barcode:

EAN 3308815081410



SANICONDENS® Best Flat



Low entry for floor standing boilers

Easy installation:

Complete installation kit supplied with non-return valve, integrated neutralisation system and alarm pre-connection.




Integrated neutralisation system to protect pipes from acid attacks. Complete and compact system.

Quiet unit.

SEMI-TRANSPARENT VIEW



PUMP CURVE

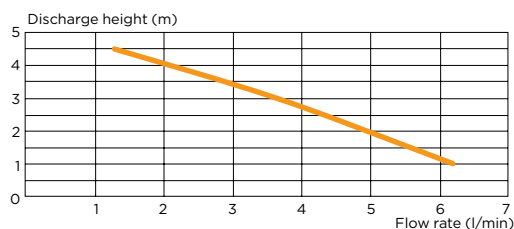

PACKAGING

SANICONDENS® Best Flat

Wall mounting and non-return valve supplied

Delivered with: fixing screw, 1 inlet adapter, 1 outlet adapter (50mm), 1 drain hose (5m) internal diameter 10mm, and 1 power cable of 1.5m, 1 alarm cable 2 strands 1.5m.

TECHNICAL FEATURES

Ø inlet	28 mm
Number of possible inlets	3
Ø discharge pipework	32 mm
Tank volume	3.5 l
Maximum flow	380 l/h
Maximum incoming water temperature	80°C
Max power of gas boiler	80 kW
Max power of oil boiler	50 kW
Voltage	220-240 V
Supply frequency	50 Hz
Max power	60 W
Electrical class	Single phase
IP rating	IP20
Weight	2 kg
Low noise level	< 45 dB(A)