

SCIROCCO

Table-type condenser

AIR HEAT EXCHANGER MANUFACTURER



stefaniexchangers.com

SCIROCCO

Table-type condenser





SCIROCCO is the table-type condenser for refrigeration, conditioning and industrial process applications.

Table-type condenser

FLUIDS AVAILABLE

- Synthetic refrigerants
- CO₂ - gas cooler 120 bar
- NH₃ - ammonia condenser

- 15%

**REFRIGERANT CHARGE
COMPARED TO MARKET REFERENCE**

603

models

3

years of warranty

From 5 to 1.400 kW

DT 15K Capacity

Up to 6 kW/lt

R404A - DT1 15°C Ø 630/910
8 poles

+ 12%

increased thickness
high-efficiency rippled tube

+ 20%

increased thickness
high-efficiency louvered fins



Performance



kW/It and kW/W performance
at the top of the market.



Versions with Standard, L and XL module
to optimize power density, absorption and noise, plus a very large range to choose from.

Solidity



Increased thicknesses in the coil
without compromising on material quality.



Metal structure in painted plate, thickness 1,5 mm
for excellent solidity.

SCIROCCO

Table-type condenser



Contact Free™
For maximum reliability
against leaks.



Fan shroud and plenum
For high exchange
efficiency.



Hinged fan shroud
Getting access for cleaning
is easier than you think.



Silencers
We offer silencers to
reduce noise levels, also in
plus version.

Accessories

- EC fan motors
- Two silencers available for fans (D800-D900)
- Corrosion treatment for coil resistant up to 6000 h in salt fog
- Coil easy access for cleaning



Range

Machine length	0,5 ÷ 12,5 m
3 fin spacing	2,1 - 2,4 - 3,6 mm
Fan size	Ø 350 - 500 - 630 - 800 - 900 - 1000 mm
DT 15K Capacity	5 ÷ 1.430 kW
Number of fans	1 ÷ 16

	Fan size Ø mm	DT 15K Capacity kW	Number of fans
SCIROCCO 35	350	5 ÷ 60	1 ÷ 6
SCIROCCO 50	500	12 ÷ 240	1 ÷ 8
SCIROCCO 63	630	17 ÷ 430	1 ÷ 8
SCIROCCO-L 63	630	18 ÷ 350	1 ÷ 6
SCIROCCO 80	800	48 ÷ 1150	1 ÷ 16
SCIROCCO-L 80	800	55 ÷ 1000	1 ÷ 12
SCIROCCO-L 90	900	46 ÷ 1430	1 ÷ 12
SCIROCCO-XL 90	900	48 ÷ 1300	1 ÷ 10
SCIROCCO-L 100	1000	70 ÷ 1300	1 ÷ 12
SCIROCCO-XL 100	1000	80 ÷ 1170	1 ÷ 10

SCIROCCO 35

Table-type condenser




Ø 350 mm
FAN SIZE


5 ÷ 60 kW
DT 15K CAPACITY

1 ÷ 6
NUMBER OF FANS


SCIROCCO 35-1




SCIROCCO 35-2.2




SCIROCCO 35-2



SCIROCCO 35-3.2




SCIROCCO 35-3




DIMENSIONS

SCIROCCO 35-1/2/3

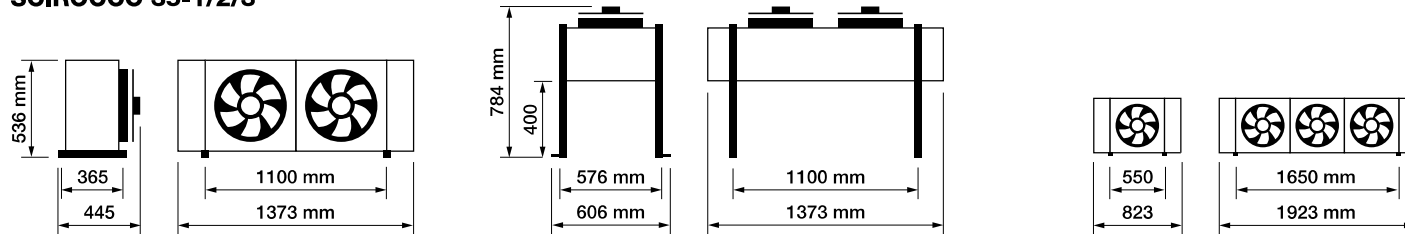

SCIROCCO 35-2.2/3.2

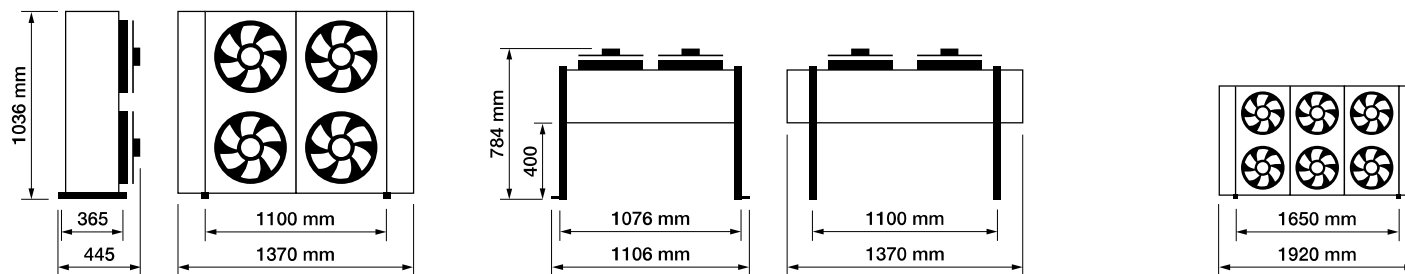

SELECTION CODE

SCIROCCO L C 35 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil lenght L = L coil lenght XL = XL coil lenght
C	C = condenser CO₂ = gas cooler NH₃ = ammonia condenser W = dry cooler
35	fan size Ø 350 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

SCIROCCO 35



Table-type condenser

1 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m ²	m ³ /h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 35-1 A 4	7,7	10,9	2650	38	1x1	350	1340	165	0,7	0,9	19	16	16
SCIROCCO C 35-1 B 4	9,9	16,4	2450	38	1x1	350	1340	165	0,7	1,4	20	16	16
SCIROCCO C 35-2 A 4	15,8	21,8	5300	41	1x2	350	1340	330	1,5	1,8	34	22	18
SCIROCCO C 35-2 B 4	19,1	32,7	4900	41	1x2	350	1340	330	1,5	2,7	37	22	18
SCIROCCO C 35-3 A 4	23,6	32,7	7950	42	1x3	350	1340	495	2,2	2,7	49	22	18
SCIROCCO C 35-3 B 4	29,8	49,1	7400	42	1x3	350	1340	495	2,2	4,0	54	28	22
SCIROCCO C 35-2.2 A 4	31,6	43,7	10600	44	2x2	350	1340	660	2,9	3,6	59	22	18
SCIROCCO C 35-2.2 B 4	39,1	65,5	9850	44	2x2	350	1340	660	2,9	5,3	66	28	22
SCIROCCO C 35-3.2 A 4	47,2	65,4	15900	45	2x3	350	1340	990	4,4	5,3	86	28	22
SCIROCCO C 35-3.2 B 4	58,3	98,2	14750	45	2x3	350	1340	990	4,4	8,0	96	35	28

1 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m ²	m ³ /h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 35-1 A 6	5,7	10,9	1700	31	1x1	350	930	67	0,3	0,9	19	16	16
SCIROCCO C 35-1 B 6	6,9	16,4	1550	31	1x1	350	930	67	0,3	1,4	20	16	16
SCIROCCO C 35-2 A 6	11,8	21,8	3400	34	1x2	350	930	134	0,6	1,8	34	22	18
SCIROCCO C 35-2 B 6	13,5	32,7	3150	34	1x2	350	930	134	0,6	2,7	37	22	18
SCIROCCO C 35-3 A 6	17,4	32,7	5100	35	1x3	350	930	201	1,0	2,7	49	22	18
SCIROCCO C 35-3 B 6	20,7	49,1	4700	35	1x3	350	930	201	1,0	4,0	54	28	22
SCIROCCO C 35-2.2 A 6	23,5	43,7	6800	37	2x2	350	930	268	1,3	3,6	59	22	18
SCIROCCO C 35-2.2 B 6	27,4	65,5	6250	37	2x2	350	930	268	1,3	5,3	66	28	22
SCIROCCO C 35-3.2 A 6	35,3	65,4	10200	38	2x3	350	930	402	1,9	5,3	86	28	22
SCIROCCO C 35-3.2 B 6	40,9	98,2	9400	38	2x3	350	930	402	1,9	8,0	96	35	28

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO 50

Table-type condenser



Ø 500 mm
FAN SIZE


12 ÷ 240 kW
DT 15K CAPACITY

1 ÷ 8
NUMBER OF FANS


SCIROCCO 50-1




SCIROCCO 50-2.2




SCIROCCO 50-2




SCIROCCO 50-3.2




SCIROCCO 50-3



SCIROCCO 50-3.4




SCIROCCO 50-4




DIMENSIONS

SCIROCCO 50-1/2/3/4

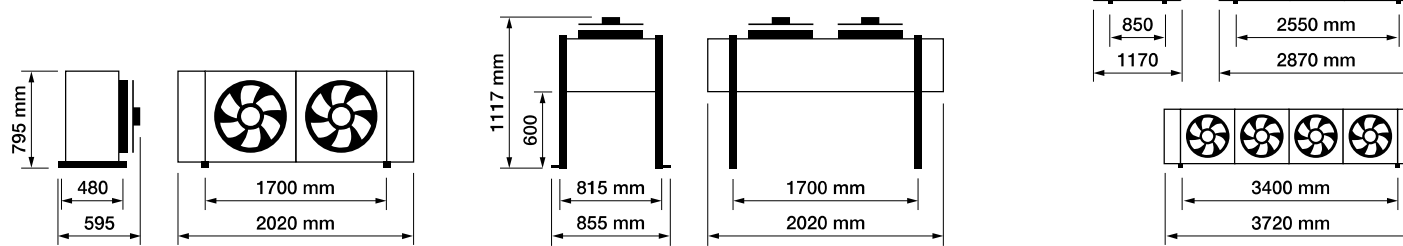

SCIROCCO 50-2.2/3.2/4.2

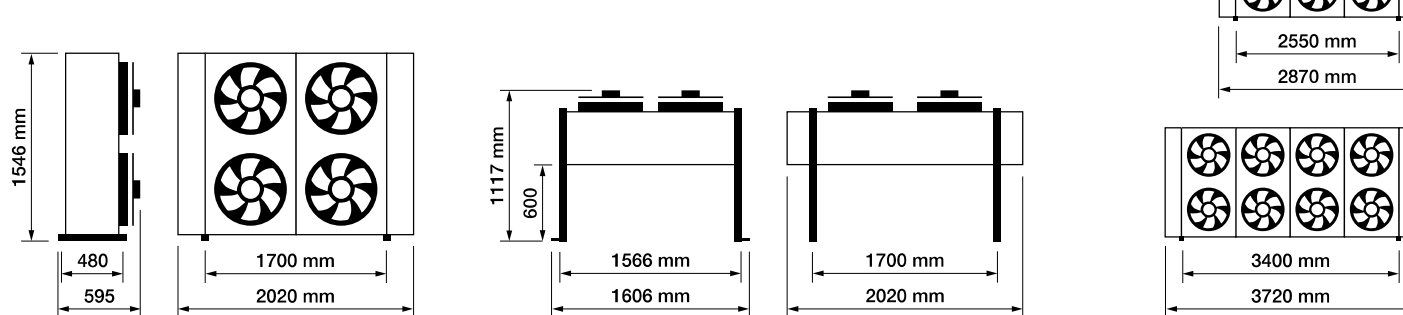

SELECTION CODE

SCIROCCO L C 50 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil lenght L = L coil lenght XL = XL coil lenght
C	C = condenser CO ₂ = gas cooler NH ₃ = ammonia condenser W = dry cooler
50	fan size Ø 500 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO 50



Table-type condenser

3 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 50-1 A 4	21,1	25,3	7700	44	1x1	500	1390	720	1,41	2,1	48	22,0	18
SCIROCCO C 50-1 B 4	27,2	38,0	7250	44	1x1	500	1390	720	1,41	3,1	52	22,0	18
SCIROCCO C 50-1 C 4	29,3	50,6	6850	44	1x1	500	1390	720	1,41	4,1	56	28,0	22
SCIROCCO C 50-2 A 4	42,2	50,6	15350	47	1x2	500	1390	1440	2,82	4,1	88	28,0	22
SCIROCCO C 50-2 B 4	55,3	75,8	14500	47	1x2	500	1390	1440	2,82	6,2	96	35,0	28
SCIROCCO C 50-2 C 4	59,7	101,2	13700	47	1x2	500	1390	1440	2,82	8,2	103	35,0	28
SCIROCCO C 50-3 A 4	61,5	75,9	23050	48	1x3	500	1390	2160	4,23	6,2	128	35,0	28
SCIROCCO C 50-3 B 4	83,4	113,9	21750	48	1x3	500	1390	2160	4,23	9,2	140	42,0	35
SCIROCCO C 50-3 C 4	90,2	151,8	20600	48	1x3	500	1390	2160	4,23	12,3	151	54,0	42
SCIROCCO C 50-4 A 4	84,7	101,2	30750	49	1x4	500	1390	2880	5,64	8,2	169	35,0	28
SCIROCCO C 50-4 B 4	110,9	151,8	28950	49	1x4	500	1390	2880	5,64	12,3	184	42,0	35
SCIROCCO C 50-4 C 4	119,5	202,4	27450	49	1x4	500	1390	2880	5,64	16,4	200	54,0	42
SCIROCCO C 50-2.2 A 4	84,5	101,2	30750	49	2x2	500	1390	2880	5,64	8,2	155	28,0	22
SCIROCCO C 50-2.2 B 4	110,7	151,8	28950	49	2x2	500	1390	2880	5,64	12,3	170	35,0	28
SCIROCCO C 50-2.2 C 4	119,3	202,4	27450	49	2x2	500	1390	2880	5,64	16,4	186	35,0	28
SCIROCCO C 50-3.2 A 4	123,0	151,8	46100	51	2x3	500	1390	4320	8,46	12,3	226	35,0	28
SCIROCCO C 50-3.2 B 4	166,8	227,7	43450	51	2x3	500	1390	4320	8,46	18,4	250	42,0	35
SCIROCCO C 50-3.2 C 4	180,5	303,6	41150	51	2x3	500	1390	4320	8,46	24,5	273	54,0	42
SCIROCCO C 50-4.2 A 4	169,4	202,4	61450	52	2x4	500	1390	5760	11,28	16,4	298	35,0	28
SCIROCCO C 50-4.2 B 4	221,7	303,6	57950	52	2x4	500	1390	5760	11,28	24,5	330	42,0	35
SCIROCCO C 50-4.2 C 4	239,0	404,9	54900	52	2x4	500	1390	5760	11,28	32,7	361	54,0	42

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 50-1 A 6	16,1	25,3	5000	40	1x1	500	920	260	0,63	2,1	48	22,0	18
SCIROCCO C 50-1 B 6	19,6	38,0	4700	40	1x1	500	920	260	0,63	3,1	52	22,0	18
SCIROCCO C 50-1 C 6	20,4	50,6	4450	40	1x1	500	920	260	0,63	4,1	56	28,0	22
SCIROCCO C 50-2 A 6	32,0	50,6	9950	43	1x2	500	920	520	1,26	4,1	88	28,0	22
SCIROCCO C 50-2 B 6	39,6	75,8	9400	43	1x2	500	920	520	1,26	6,2	96	35,0	28
SCIROCCO C 50-2 C 6	41,1	101,2	8900	43	1x2	500	920	520	1,26	8,2	103	35,0	28
SCIROCCO C 50-3 A 6	46,5	75,9	14950	44	1x3	500	920	780	1,89	6,2	128	35,0	28
SCIROCCO C 50-3 B 6	59,6	113,9	14050	44	1x3	500	920	780	1,89	9,2	140	42,0	35
SCIROCCO C 50-3 C 6	62,0	151,8	13300	44	1x3	500	920	780	1,89	12,3	151	54,0	42
SCIROCCO C 50-4 A 6	64,2	101,2	19900	45	1x4	500	920	1040	2,52	8,2	169	35,0	28
SCIROCCO C 50-4 B 6	79,4	151,8	18750	45	1x4	500	920	1040	2,52	12,3	184	42,0	35
SCIROCCO C 50-4 C 6	82,3	202,4	17750	45	1x4	500	920	1040	2,52	16,4	200	54,0	42
SCIROCCO C 50-2.2 A 6	64,1	101,2	19900	45	2x2	500	920	1040	2,52	8,2	155	28,0	22
SCIROCCO C 50-2.2 B 6	79,3	151,8	18750	45	2x2	500	920	1040	2,52	12,3	170	35,0	28
SCIROCCO C 50-2.2 C 6	82,2	202,4	17750	45	2x2	500	920	1040	2,52	16,4	186	35,0	28
SCIROCCO C 50-3.2 A 6	93,1	151,8	29850	47	2x3	500	920	1560	3,78	12,3	226	35,0	28
SCIROCCO C 50-3.2 B 6	119,1	227,7	28150	47	2x3	500	920	1560	3,78	18,4	250	42,0	35
SCIROCCO C 50-3.2 C 6	124,0	303,6	26600	47	2x3	500	920	1560	3,78	24,5	273	54,0	42
SCIROCCO C 50-4.2 A 6	128,4	202,4	39800	48	2x4	500	920	2080	5,04	16,4	298	35,0	28
SCIROCCO C 50-4.2 B 6	158,9	303,6	37500	48	2x4	500	920	2080	5,04	24,5	330	42,0	35
SCIROCCO C 50-4.2 C 6	164,6	404,9	35500	48	2x4	500	920	2080	5,04	32,7	361	54,0	42

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO 50



Table-type condenser

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 50-1 A 8	13,7	25,3	3750	34	1x1	500	660	130	0,3	2,1	48	22,0	18
SCIROCCO C 50-1 B 8	15,8	38,0	3500	34	1x1	500	660	130	0,3	3,1	52	22,0	18
SCIROCCO C 50-1 C 8	15,7	50,6	3300	34	1x1	500	660	130	0,3	4,1	56	28,0	22
SCIROCCO C 50-2 A 8	27,3	50,6	7450	37	1x2	500	660	260	0,6	4,1	88	28,0	22
SCIROCCO C 50-2 B 8	31,7	75,8	7000	37	1x2	500	660	260	0,6	6,2	96	35,0	28
SCIROCCO C 50-2 C 8	31,7	101,2	6600	37	1x2	500	660	260	0,6	8,2	103	35,0	28
SCIROCCO C 50-3 A 8	39,7	75,9	11200	38	1x3	500	660	390	0,9	6,2	128	35,0	28
SCIROCCO C 50-3 B 8	47,7	113,9	10500	38	1x3	500	660	390	0,9	9,2	140	42,0	35
SCIROCCO C 50-3 C 8	47,8	151,8	9900	38	1x3	500	660	390	0,9	12,3	151	54,0	42
SCIROCCO C 50-4 A 8	54,7	101,2	14900	39	1x4	500	660	520	1,2	8,2	169	35,0	28
SCIROCCO C 50-4 B 8	63,6	151,8	14000	39	1x4	500	660	520	1,2	12,3	184	42,0	35
SCIROCCO C 50-4 C 8	63,5	202,4	13200	39	1x4	500	660	520	1,2	16,4	200	54,0	42
SCIROCCO C 50-2.2 A 8	54,6	101,2	14900	39	2x2	500	660	520	1,2	8,2	155	28,0	22
SCIROCCO C 50-2.2 B 8	63,5	151,8	14000	39	2x2	500	660	520	1,2	12,3	170	35,0	28
SCIROCCO C 50-2.2 C 8	63,5	202,4	13200	39	2x2	500	660	520	1,2	16,4	186	35,0	28
SCIROCCO C 50-3.2 A 8	79,4	151,8	22400	41	2x3	500	660	780	1,8	12,3	226	35,0	28
SCIROCCO C 50-3.2 B 8	95,3	227,7	21000	41	2x3	500	660	780	1,8	18,4	250	42,0	35
SCIROCCO C 50-3.2 C 8	95,6	303,6	19800	41	2x3	500	660	780	1,8	24,5	273	54,0	42
SCIROCCO C 50-4.2 A 8	109,4	202,4	29850	42	2x4	500	660	1040	2,4	16,4	298	35,0	28
SCIROCCO C 50-4.2 B 8	127,1	303,6	27950	42	2x4	500	660	1040	2,4	24,5	330	42,0	35
SCIROCCO C 50-4.2 C 8	127,1	404,9	26400	42	2x4	500	660	1040	2,4	32,7	361	54,0	42

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO 63

Table-type condenser



Ø 630 mm
FAN SIZE


17 ÷ 430 kW
DT 15K CAPACITY

1 ÷ 8
NUMBER OF FANS


SCIROCCO 63-1




SCIROCCO 63-2.2




SCIROCCO 63-2




SCIROCCO 63-3.2




SCIROCCO 63-3



SCIROCCO 63-3.4




SCIROCCO 63-4




DIMENSIONS

SCIROCCO 63-1/2/3/4

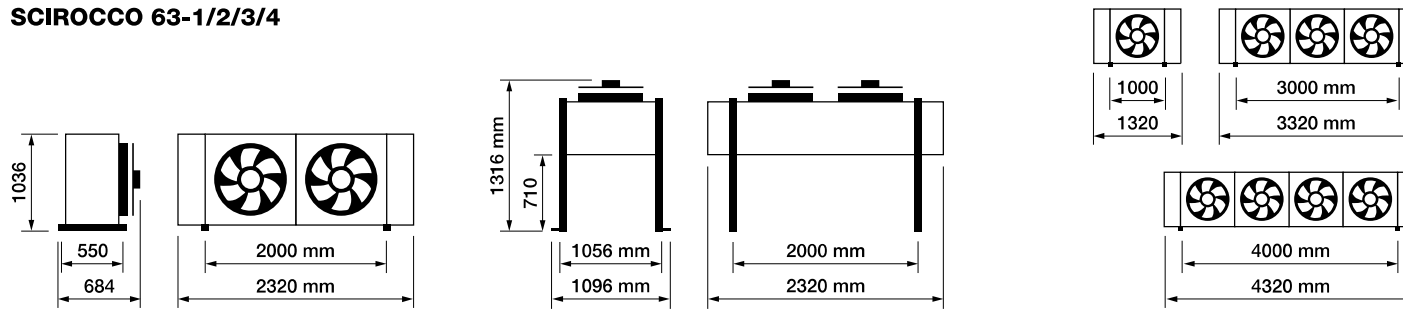

SCIROCCO 63-2.2/3.2/4.2

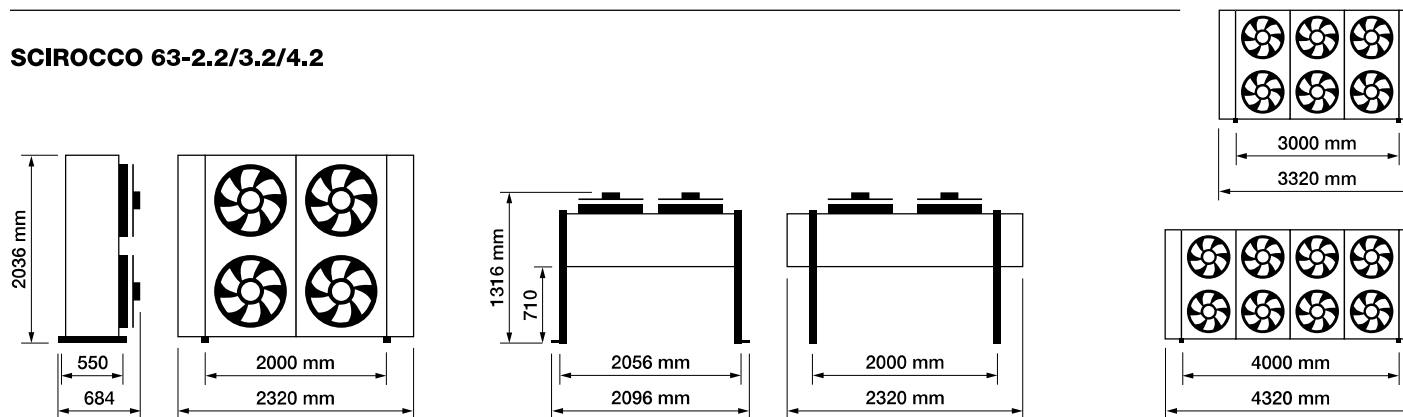

SELECTION CODE

SCIROCCO L C 63 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil lenght L = L coil lenght XL = XL coil lenght
C	C = condenser CO ₂ = gas cooler NH ₃ = ammonia condenser W = dry cooler
63	fan size Ø 630 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.



3 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 63-1 A 4	36,8	39,7	14250	50	1x1	630	1310	1970	3,4	3,3	72	28,0	22
SCIROCCO C 63-1 B 4	48,5	59,5	13500	50	1x1	630	1310	1970	3,4	4,9	78	28,0	22
SCIROCCO C 63-1 C 4	53,2	79,4	12800	50	1x1	630	1310	1970	3,4	6,5	84	35,0	28
SCIROCCO C 63-2 A 4	74,0	79,4	28550	52	1x2	630	1310	3940	6,8	6,5	134	35,0	28
SCIROCCO C 63-2 B 4	97,6	119,1	26950	52	1x2	630	1310	3940	6,8	9,7	147	35,0	28
SCIROCCO C 63-2 C 4	106,8	158,8	25550	52	1x2	630	1310	3940	6,8	12,9	159	42,0	35
SCIROCCO C 63-3 A 4	109,7	119,1	42800	54	1x3	630	1310	5910	10,2	9,7	197	35,0	28
SCIROCCO C 63-3 B 4	148,6	178,6	40450	54	1x3	630	1310	5910	10,2	14,5	216	42,0	35
SCIROCCO C 63-3 C 4	162,8	238,2	38350	54	1x3	630	1310	5910	10,2	19,3	234	54,0	42
SCIROCCO C 63-4 A 4	148,4	158,8	57050	55	1x4	630	1310	7880	13,6	12,9	261	42,0	35
SCIROCCO C 63-4 B 4	195,6	238,2	53900	55	1x4	630	1310	7880	13,6	19,3	285	54,0	42
SCIROCCO C 63-4 C 4	214,0	317,5	51100	55	1x4	630	1310	7880	13,6	25,7	309	64,0	54
SCIROCCO C 63-2.2 A 4	148,0	158,8	57050	55	2x2	630	1310	7880	13,6	12,9	245	35,0	28
SCIROCCO C 63-2.2 B 4	195,1	238,2	53900	55	2x2	630	1310	7880	13,6	19,3	269	35,0	28
SCIROCCO C 63-2.2 C 4	213,5	317,5	51100	55	2x2	630	1310	7880	13,6	25,7	294	42,0	35
SCIROCCO C 63-3.2 A 4	219,3	238,2	85600	57	2x3	630	1310	11820	20,4	19,3	360	35,0	28
SCIROCCO C 63-3.2 B 4	297,1	357,2	80850	57	2x3	630	1310	11820	20,4	28,9	397	42,0	35
SCIROCCO C 63-3.2 C 4	325,5	476,3	76700	57	2x3	630	1310	11820	20,4	38,5	433	42,0	28
SCIROCCO C 63-4.2 A 4	296,8	317,5	114100	58	2x4	630	1310	15760	27,2	25,7	476	42,0	35
SCIROCCO C 63-4.2 B 4	391,2	476,3	107800	58	2x4	630	1310	15760	27,2	38,5	525	54,0	42
SCIROCCO C 63-4.2 C 4	427,9	635,1	102250	58	2x4	630	1310	15760	27,2	51,3	574	64,0	54

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 63-1 A 6	28,4	39,7	9250	39	1x1	630	890	600	1,2	3,3	72	28,0	22
SCIROCCO C 63-1 B 6	35,5	59,5	8700	39	1x1	630	890	600	1,2	4,9	78	28,0	22
SCIROCCO C 63-1 C 6	37,3	79,4	8250	39	1x1	630	890	600	1,2	6,5	84	35,0	28
SCIROCCO C 63-2 A 6	57,1	79,4	18500	41	1x2	630	890	1200	2,4	6,5	134	35,0	28
SCIROCCO C 63-2 B 6	71,1	119,1	17450	41	1x2	630	890	1200	2,4	9,7	147	35,0	28
SCIROCCO C 63-2 C 6	74,7	158,8	16550	41	1x2	630	890	1200	2,4	12,9	159	42,0	35
SCIROCCO C 63-3 A 6	84,1	119,1	27750	43	1x3	630	890	1800	3,6	9,7	197	35,0	28
SCIROCCO C 63-3 B 6	107,6	178,6	26150	43	1x3	630	890	1800	3,6	14,5	216	42,0	35
SCIROCCO C 63-3 C 6	113,2	238,2	24800	43	1x3	630	890	1800	3,6	19,3	234	54,0	42
SCIROCCO C 63-4 A 6	114,4	158,8	37000	44	1x4	630	890	2400	4,8	12,9	261	42,0	35
SCIROCCO C 63-4 B 6	142,5	238,2	34900	44	1x4	630	890	2400	4,8	19,3	285	54,0	42
SCIROCCO C 63-4 C 6	149,7	317,5	33050	44	1x4	630	890	2400	4,8	25,7	309	64,0	54
SCIROCCO C 63-2.2 A 6	114,1	158,8	37000	44	2x2	630	890	2400	4,8	12,9	245	35,0	28
SCIROCCO C 63-2.2 B 6	142,3	238,2	34900	44	2x2	630	890	2400	4,8	19,3	269	35,0	28
SCIROCCO C 63-2.2 C 6	149,5	317,5	33050	44	2x2	630	890	2400	4,8	25,7	294	42,0	35
SCIROCCO C 63-3.2 A 6	168,1	238,2	55500	46	2x3	630	890	3600	7,2	19,3	360	35,0	28
SCIROCCO C 63-3.2 B 6	215,2	357,2	52350	46	2x3	630	890	3600	7,2	28,9	397	42,0	35
SCIROCCO C 63-3.2 C 6	226,4	476,3	49600	46	2x3	630	890	3600	7,2	38,5	433	35,0	28
SCIROCCO C 63-4.2 A 6	228,7	317,5	74000	47	2x4	630	890	4800	9,6	25,7	476	42,0	35
SCIROCCO C 63-4.2 B 6	285,0	476,3	69800	47	2x4	630	890	4800	9,6	38,5	525	54,0	42
SCIROCCO C 63-4.2 C 6	299,3	635,1	66100	47	2x4	630	890	4800	9,6	51,3	574	64,0	54

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO 63



Table-type condenser

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 63-1 A 8	21,6	39,7	5850	32	1x1	630	650	235	0,55	3,3	72	28,0	22
SCIROCCO C 63-1 B 8	25,1	59,5	5550	32	1x1	630	650	235	0,55	4,9	78	28,0	22
SCIROCCO C 63-1 C 8	25,3	79,4	5300	32	1x1	630	650	235	0,55	6,5	84	35,0	28
SCIROCCO C 63-2 A 8	43,2	79,4	11700	34	1x2	630	650	470	1,1	6,5	134	35,0	28
SCIROCCO C 63-2 B 8	50,3	119,1	11150	34	1x2	630	650	470	1,1	9,7	147	35,0	28
SCIROCCO C 63-2 C 8	50,8	158,8	10600	34	1x2	630	650	470	1,1	12,9	159	42,0	35
SCIROCCO C 63-3 A 8	63,6	119,1	17550	36	1x3	630	650	705	1,65	9,7	197	35,0	28
SCIROCCO C 63-3 B 8	75,8	178,6	16700	36	1x3	630	650	705	1,65	14,5	216	42,0	35
SCIROCCO C 63-3 C 8	76,6	238,2	15900	36	1x3	630	650	705	1,65	19,3	234	54,0	42
SCIROCCO C 63-4 A 8	86,6	158,8	23400	37	1x4	630	650	940	2,2	12,9	261	42,0	35
SCIROCCO C 63-4 B 8	100,7	238,2	22250	37	1x4	630	650	940	2,2	19,3	285	54,0	42
SCIROCCO C 63-4 C 8	101,6	317,5	21200	37	1x4	630	650	940	2,2	25,7	309	64,0	54
SCIROCCO C 63-2.2 A 8	86,5	158,8	23400	37	2x2	630	650	940	2,2	12,9	245	35,0	28
SCIROCCO C 63-2.2 B 8	100,6	238,2	22250	37	2x2	630	650	940	2,2	19,3	269	35,0	28
SCIROCCO C 63-2.2 C 8	101,5	317,5	21200	37	2x2	630	650	940	2,2	25,7	294	42,0	35
SCIROCCO C 63-3.2 A 8	127,1	238,2	35100	39	2x3	630	650	1410	3,3	19,3	360	35,0	28
SCIROCCO C 63-3.2 B 8	151,6	357,2	33400	39	2x3	630	650	1410	3,3	28,9	397	42,0	35
SCIROCCO C 63-3.2 C 8	153,2	476,3	31850	39	2x3	630	650	1410	3,3	38,5	433	35,0	28
SCIROCCO C 63-4.2 A 8	173,2	317,5	46800	40	2x4	630	650	1880	4,4	25,7	476	42,0	35
SCIROCCO C 63-4.2 B 8	201,5	476,3	44500	40	2x4	630	650	1880	4,4	38,5	525	54,0	42
SCIROCCO C 63-4.2 C 8	203,2	635,1	42450	40	2x4	630	650	1880	4,4	51,3	574	64,0	54

3 PH 12 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 63-1 A 12	16,7	39,7	4150	25	1x1	630	420	110	0,27	3,3	72	28	22
SCIROCCO C 63-1 B 12	18,3	59,5	3900	25	1x1	630	420	110	0,27	4,9	78	28	22
SCIROCCO C 63-1 C 12	17,9	79,4	3650	25	1x1	630	420	110	0,27	6,5	84	35	28
SCIROCCO C 63-2 A 12	33,4	79,4	8250	27	1x2	630	420	220	0,54	6,5	134	35	28
SCIROCCO C 63-2 B 12	36,7	119,1	7750	27	1x2	630	420	220	0,54	9,7	147	35	28
SCIROCCO C 63-2 C 12	35,8	158,8	7350	27	1x2	630	420	220	0,54	12,9	159	42	35
SCIROCCO C 63-3 A 12	49,2	119,1	12400	29	1x3	630	420	330	0,81	9,7	197	35	28
SCIROCCO C 63-3 B 12	55,2	178,6	11650	29	1x3	630	420	330	0,81	14,5	216	42	35
SCIROCCO C 63-3 C 12	53,9	238,2	11000	29	1x3	630	420	330	0,81	19,3	234	54	42
SCIROCCO C 63-4 A 12	67,0	158,8	16550	30	1x4	630	420	440	1,08	12,9	261	42	35
SCIROCCO C 63-4 B 12	73,4	238,2	15550	30	1x4	630	420	440	1,08	19,3	285	54	42
SCIROCCO C 63-4 C 12	71,6	317,5	14650	30	1x4	630	420	440	1,08	25,7	309	64	54
SCIROCCO C 63-2.2 A 12	66,9	158,8	16550	30	2x2	630	420	440	1,08	12,9	245	35	28
SCIROCCO C 63-2.2 B 12	73,4	238,2	15550	30	2x2	630	420	440	1,08	19,3	269	35	28
SCIROCCO C 63-2.2 C 12	71,6	317,5	14650	30	2x2	630	420	440	1,08	25,7	294	42	35
SCIROCCO C 63-3.2 A 12	98,3	238,2	24800	32	2x3	630	420	660	1,62	19,3	360	35	28
SCIROCCO C 63-3.2 B 12	110,4	357,2	23300	32	2x3	630	420	660	1,62	28,9	397	42	35
SCIROCCO C 63-3.2 C 12	107,8	476,3	22000	32	2x3	630	420	660	1,62	38,5	433	35	28
SCIROCCO C 63-4.2 A 12	133,9	317,5	33050	33	2x4	630	420	880	2,16	25,7	476	42	35
SCIROCCO C 63-4.2 B 12	146,8	476,3	31100	33	2x4	630	420	880	2,16	38,5	525	54	42
SCIROCCO C 63-4.2 C 12	143,2	635,1	29350	33	2x4	630	420	880	2,16	51,3	574	64,0	54

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 63

Table-type condenser




Ø 630 mm
FAN SIZE


18 ÷ 350 kW
DT 15K CAPACITY

1 ÷ 6
NUMBER OF FANS


SCIROCCO-L 63-1




SCIROCCO-L 63-2.2




SCIROCCO-L 63-2



SCIROCCO-L 63-3.2




SCIROCCO-L 63-3




DIMENSIONS

SCIROCCO-L 63-1/2/3

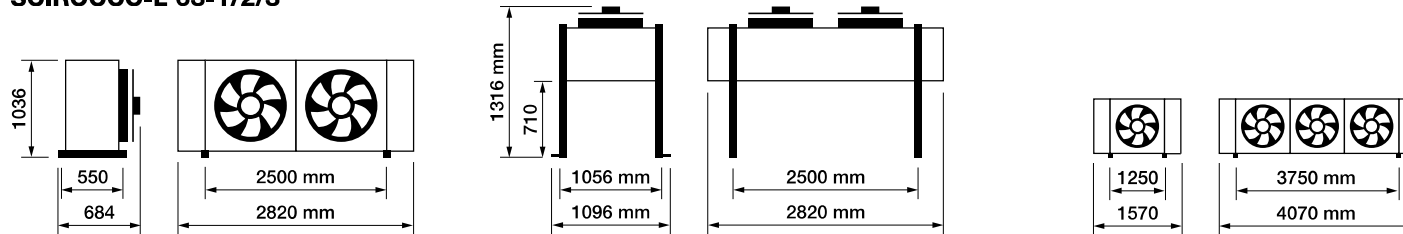

SCIROCCO-L 63-2.2/3.2

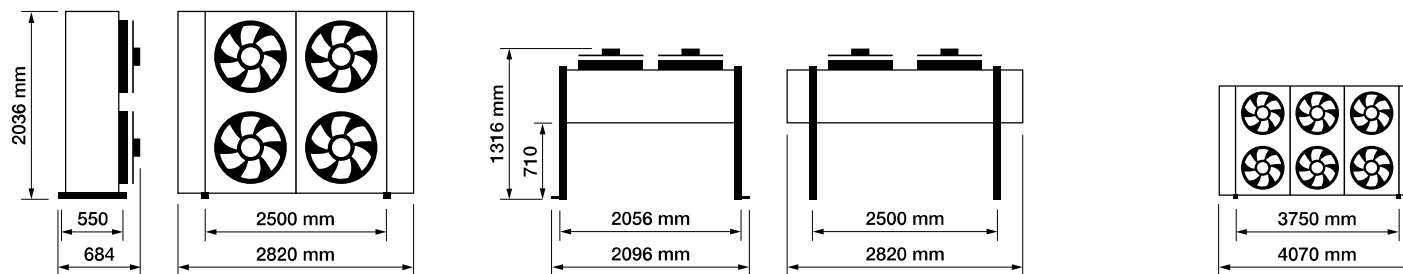

SELECTION CODE

SCIROCCO L C 63 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil length L = L coil length XL = XL coil length
C	C = condenser CO ₂ = gas cooler NH ₃ = ammonia condenser W = dry cooler
63	fan size Ø 630 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

SCIROCCO-L 63



Table-type condenser

3 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 63-1 A 4	41,0	49,6	14850	50	1x1	630	1310	1970	3,4	4,1	80	28,0	22
SCIROCCO-L C 63-1 B 4	54,0	74,4	14200	50	1x1	630	1310	1970	3,4	6,1	88	28,0	22
SCIROCCO-L C 63-1 C 4	57,5	99,2	13650	50	1x1	630	1310	1970	3,4	8,1	96	35,0	28
SCIROCCO-L C 63-2 A 4	82,0	99,2	29650	52	1x2	630	1310	3940	6,8	8,1	152	35,0	28
SCIROCCO-L C 63-2 B 4	105,7	148,8	28450	52	1x2	630	1310	3940	6,8	12,1	167	42,0	35
SCIROCCO-L C 63-2 C 4	115,5	198,5	27350	52	1x2	630	1310	3940	6,8	16,1	182	42,0	35
SCIROCCO-L C 63-3 A 4	124,0	148,8	44500	54	1x3	630	1310	5910	10,2	12,1	223	42,0	35
SCIROCCO-L C 63-3 B 4	162,6	223,3	42650	54	1x3	630	1310	5910	10,2	18,1	246	54,0	42
SCIROCCO-L C 63-3 C 4	177,3	297,7	41000	54	1x3	630	1310	5910	10,2	24,1	269	64,0	54
SCIROCCO-L C 63-2.2 A 4	164,0	198,5	59350	55	2x2	630	1310	7880	13,6	16,1	274	35,0	28
SCIROCCO-L C 63-2.2 B 4	211,4	297,7	56900	55	2x2	630	1310	7880	13,6	24,1	305	42,0	35
SCIROCCO-L C 63-2.2 C 4	231,0	396,9	54650	55	2x2	630	1310	7880	13,6	32,1	335	42,0	35
SCIROCCO-L C 63-3.2 A 4	247,9	297,7	89000	57	2x3	630	1310	11820	20,4	24,1	405	42,0	35
SCIROCCO-L C 63-3.2 B 4	325,2	446,5	85300	57	2x3	630	1310	11820	20,4	36,1	450	54,0	42
SCIROCCO-L C 63-3.2 C 4	354,5	595,4	82000	57	2x3	630	1310	11820	20,4	48,1	496	64,0	54

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 63-1 A 6	31,2	49,6	9600	39	1x1	630	890	600	1,2	4,1	80	28,0	22
SCIROCCO-L C 63-1 B 6	38,9	74,4	9200	39	1x1	630	890	600	1,2	6,1	88	28,0	22
SCIROCCO-L C 63-1 C 6	40,2	99,2	8850	39	1x1	630	890	600	1,2	8,1	96	35,0	28
SCIROCCO-L C 63-2 A 6	62,8	99,2	19250	41	1x2	630	890	1200	2,4	8,1	152	35,0	28
SCIROCCO-L C 63-2 B 6	76,8	148,8	18450	41	1x2	630	890	1200	2,4	12,1	167	42,0	35
SCIROCCO-L C 63-2 C 6	80,6	198,5	17700	41	1x2	630	890	1200	2,4	16,1	182	42,0	35
SCIROCCO-L C 63-3 A 6	94,1	148,8	28850	43	1x3	630	890	1800	3,6	12,1	223	42,0	35
SCIROCCO-L C 63-3 B 6	116,9	223,3	27650	43	1x3	630	890	1800	3,6	18,1	246	54,0	42
SCIROCCO-L C 63-3 C 6	122,6	297,7	26550	43	1x3	630	890	1800	3,6	24,1	269	64,0	54
SCIROCCO-L C 63-2.2 A 6	125,7	198,5	38500	44	2x2	630	890	2400	4,8	16,1	274	35,0	28
SCIROCCO-L C 63-2.2 B 6	153,5	297,7	36900	44	2x2	630	890	2400	4,8	24,1	305	42,0	35
SCIROCCO-L C 63-2.2 C 6	161,2	396,9	35400	44	2x2	630	890	2400	4,8	32,1	335	42,0	35
SCIROCCO-L C 63-3.2 A 6	188,2	297,7	57750	46	2x3	630	890	3600	7,2	24,1	405	42,0	35
SCIROCCO-L C 63-3.2 B 6	233,8	446,5	55350	46	2x3	630	890	3600	7,2	36,1	450	54,0	42
SCIROCCO-L C 63-3.2 C 6	245,2	595,4	53100	46	2x3	630	890	3600	7,2	48,1	496	64,0	54

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 63



Table-type condenser

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 63-1 A 8	23,2	49,6	6050	32	1x1	630	650	235	0,55	4,1	80	28	22
SCIROCCO-L C 63-1 B 8	26,9	74,4	5850	32	1x1	630	650	235	0,55	6,1	88	28	22
SCIROCCO-L C 63-1 C 8	27,0	99,2	5650	32	1x1	630	650	235	0,55	8,1	96	35	28
SCIROCCO-L C 63-2 A 8	46,9	99,2	12100	34	1x2	630	650	470	1,1	8,1	152	35	28
SCIROCCO-L C 63-2 B 8	53,4	148,8	11700	34	1x2	630	650	470	1,1	12,1	167	42	35
SCIROCCO-L C 63-2 C 8	54,0	198,5	11250	34	1x2	630	650	470	1,1	16,1	182	42	35
SCIROCCO-L C 63-3 A 8	69,9	148,8	18150	36	1x3	630	650	705	1,65	12,1	223	42	35
SCIROCCO-L C 63-3 B 8	80,9	223,3	17500	36	1x3	630	650	705	1,65	18,1	246	54	42
SCIROCCO-L C 63-3 C 8	81,7	297,7	16900	36	1x3	630	650	705	1,65	24,1	269	64	54
SCIROCCO-L C 63-2.2 A 8	93,8	198,5	24250	37	2x2	630	650	940	2,2	16,1	274	35	28
SCIROCCO-L C 63-2.2 B 8	106,9	297,7	23350	37	2x2	630	650	940	2,2	24,1	305	42	35
SCIROCCO-L C 63-2.2 C 8	108,0	396,9	22550	37	2x2	630	650	940	2,2	32,1	335	42	35
SCIROCCO-L C 63-3.2 A 8	139,7	297,7	36350	39	2x3	630	650	1410	3,3	24,1	405	42	35
SCIROCCO-L C 63-3.2 B 8	161,7	446,5	35050	39	2x3	630	650	1410	3,3	36,1	450	54	42
SCIROCCO-L C 63-3.2 C 8	163,5	595,4	33800	39	2x3	630	650	1410	3,3	48,1	496	64	54

3 PH 12 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 63-1 A 12	17,9	49,6	4300	25	1x1	630	420	110	0,27	4,1	80	28,0	22
SCIROCCO-L C 63-1 B 12	19,7	74,4	4150	25	1x1	630	420	110	0,27	6,1	88	28,0	22
SCIROCCO-L C 63-1 C 12	19,2	99,2	3950	25	1x1	630	420	110	0,27	8,1	96	35,0	28
SCIROCCO-L C 63-2 A 12	36,3	99,2	8650	27	1x2	630	420	220	0,54	8,1	152	35,0	28
SCIROCCO-L C 63-2 B 12	39,2	148,8	8250	27	1x2	630	420	220	0,54	12,1	167	42,0	35
SCIROCCO-L C 63-2 C 12	38,4	198,5	7900	27	1x2	630	420	220	0,54	16,1	182	42,0	35
SCIROCCO-L C 63-3 A 12	53,9	148,8	12950	29	1x3	630	420	330	0,81	12,1	223	42,0	35
SCIROCCO-L C 63-3 B 12	59,2	223,3	12400	29	1x3	630	420	330	0,81	18,1	246	54,0	42
SCIROCCO-L C 63-3 C 12	58,0	297,7	11800	29	1x3	630	420	330	0,81	24,1	269	64,0	54
SCIROCCO-L C 63-2.2 A 12	72,6	198,5	17300	30	2x2	630	420	440	1,08	16,1	274	35,0	28
SCIROCCO-L C 63-2.2 B 12	78,5	297,7	16550	30	2x2	630	420	440	1,08	24,1	305	42,0	35
SCIROCCO-L C 63-2.2 C 12	76,9	396,9	15750	30	2x2	630	420	440	1,08	32,1	335	42,0	35
SCIROCCO-L C 63-3.2 A 12	107,9	297,7	25950	32	2x3	630	420	660	1,62	24,1	405	42,0	35
SCIROCCO-L C 63-3.2 B 12	118,5	446,5	24800	32	2x3	630	420	660	1,62	36,1	450	54,0	42
SCIROCCO-L C 63-3.2 C 12	116,0	595,4	23650	32	2x3	630	420	660	1,62	48,1	496	64,0	54

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO 80

Table-type condenser



Ø 800 mm

FAN SIZE

48 ÷ 1150 kW


DT 15K CAPACITY

1 ÷ 16


NUMBER OF FANS




SCIROCCO 80-1




SCIROCCO 80-4.2




SCIROCCO 80-2




SCIROCCO 80-5.2




SCIROCCO 80-3




SCIROCCO 80-6.2



SCIROCCO 80-4






SCIROCCO 80-7.2



SCIROCCO 80-5

SCIROCCO 80-2.2

SCIROCCO 80-3.2



SCIROCCO 80-8.2


SCIROCCO 80

Table-type condenser




DIMENSIONS

SCIROCCO 80-1/2/3/4/5

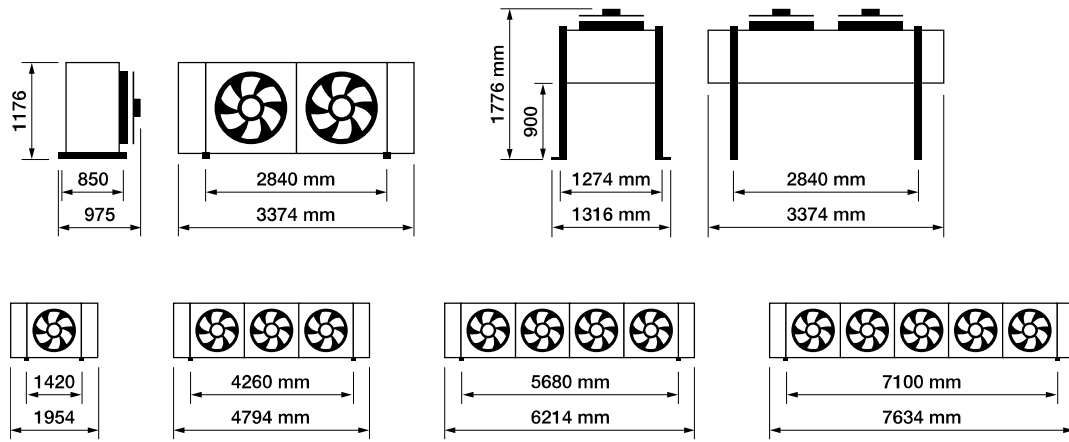

SCIROCCO 80-2.2/3.2/4.2/5.2/6.2/7.2/8.2

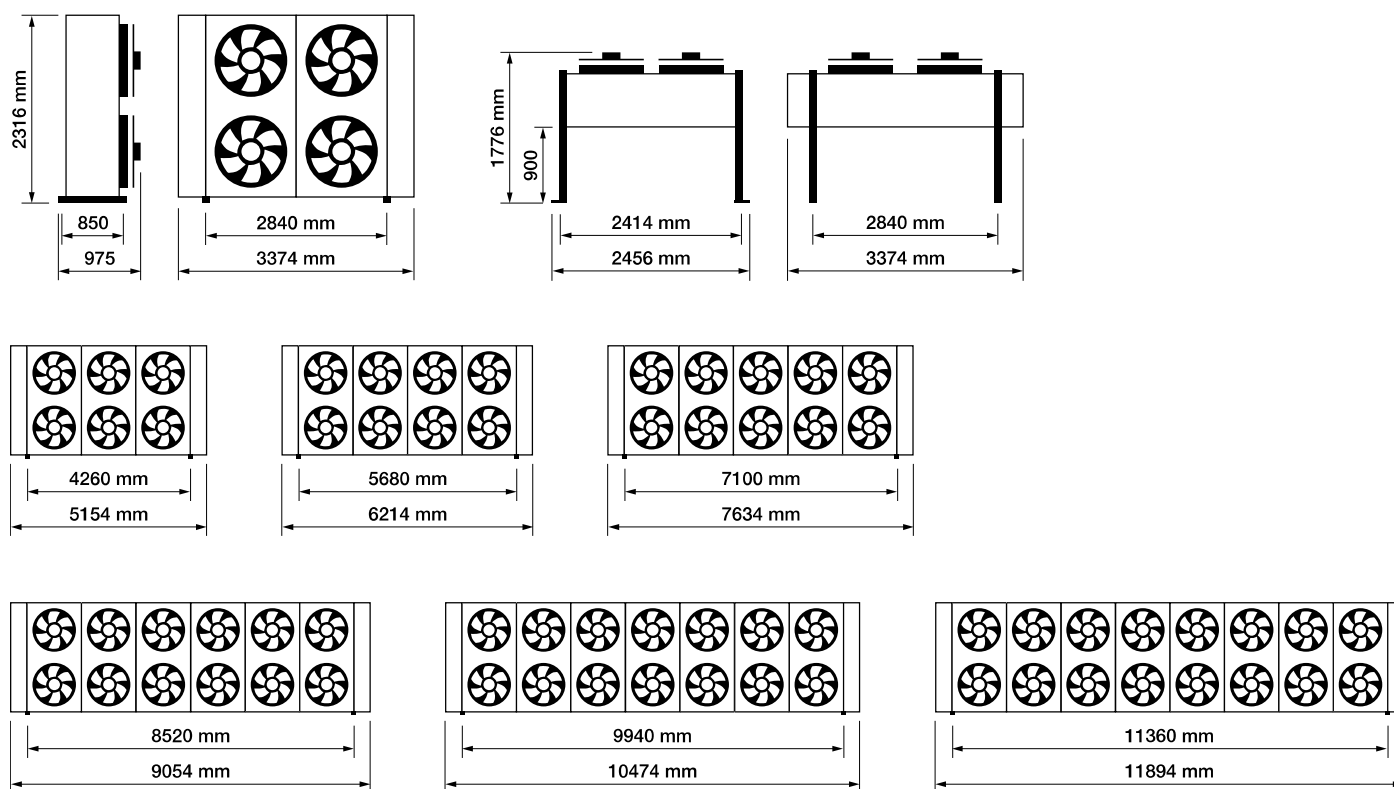

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO 80

Table-type condenser



SELECTION CODE

SCIROCCO L C 80 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil length L = L coil length XL = XL coil length
C	C = condenser CO2 = gas cooler NH3 = ammonia condenser W = dry cooler
80	fan size Ø 800 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 80-1 B 6	65,9	112,9	17400	46	1x1	800	880	1720	3,9	12	156	28	22
SCIROCCO C 80-1 C 6	70,5	150,6	16250	46	1x1	800	880	1720	3,9	16	168	35	28
SCIROCCO C 80-2 B 6	134,4	225,9	34800	49	1x2	800	880	3440	7,8	24	292	42	35
SCIROCCO C 80-2 C 6	143,6	301,4	32500	49	1x2	800	880	3440	7,8	32	316	54	42
SCIROCCO C 80-3 B 6	201,7	339,1	52200	51	1x3	800	880	5160	11,7	36	428	54	42
SCIROCCO C 80-3 C 6	216,8	452,2	48750	51	1x3	800	880	5160	11,7	48	465	54	42
SCIROCCO C 80-4 B 6	269,7	452,2	69600	52	1x4	800	880	6880	15,6	48	564	64	54
SCIROCCO C 80-4 C 6	287,5	602,9	65000	52	1x4	800	880	6880	15,6	63	613	76	64
SCIROCCO C 80-5 B 6	333,4	565,2	87000	53	1x5	800	880	8600	19,5	59	701	64	54
SCIROCCO C 80-5 C 6	354,9	753,6	81250	53	1x5	800	880	8600	19,5	79	762	76	64
SCIROCCO C 80-2.2 B 6	268,9	451,8	69600	52	2x2	800	880	6880	15,6	48	553	42	35
SCIROCCO C 80-2.2 C 6	287,2	602,9	65000	52	2x2	800	880	6880	15,6	63	601	54	42
SCIROCCO C 80-3.2 B 6	403,5	678,2	104400	54	2x3	800	880	10320	23,4	71	814	54	42
SCIROCCO C 80-3.2 C 6	433,6	904,3	97500	54	2x3	800	880	10320	23,4	95	887	54	42
SCIROCCO C 80-4.2 B 6	539,3	904,3	139250	55	2x4	800	880	13760	31,2	95	1074	64	54
SCIROCCO C 80-4.2 C 6	575,1	1205,7	130050	55	2x4	800	880	13760	31,2	126	1171	76	64
SCIROCCO C 80-5.2 B 6	666,8	1130,4	174050	55	2x5	800	880	17200	39	118	1335	64	54
SCIROCCO C 80-5.2 C 6	709,9	1507,2	162550	55	2x5	800	880	17200	39	158	1456	76	64
SCIROCCO C 80-6.2 B 6	807,3	1356,5	208850	56	2x6	800	880	20640	46,8	142	1595	64	54
SCIROCCO C 80-6.2 C 6	867,6	1808,6	195050	56	2x6	800	880	20640	46,8	189	1741	76	64
SCIROCCO C 80-7.2 B 6	945,1	1582,5	243650	57	2x7	800	880	24080	54,6	165	1855	89	76
SCIROCCO C 80-7.2 C 6	1010,6	2110	227550	57	2x7	800	880	24080	54,6	220	2025	89	76
SCIROCCO C 80-8.2 B 6	1079,4	1808,6	278450	57	2x8	800	880	27520	62,4	189	2116	89	76
SCIROCCO C 80-8.2 C 6	1150,8	2411,5	260050	57	2x8	800	880	27520	62,4	252	2310	89	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO 80



Table-type condenser

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO C 80-1 A 8	48,0	75,2	13700	39	1x1	800	680	770	2,22	8	144	28,0	22
SCIROCCO C 80-1 B 8	54,0	112,9	12700	39	1x1	800	680	770	2,22	12	156	28,0	22
SCIROCCO C 80-1 C 8	54,9	150,6	11850	39	1x1	800	680	770	2,22	16	168	35,0	28
SCIROCCO C 80-2 A 8	96,2	150,4	27400	42	1x2	800	680	1540	4,44	16	267	42,0	35
SCIROCCO C 80-2 B 8	109,7	225,9	25400	42	1x2	800	680	1540	4,44	24	292	42,0	35
SCIROCCO C 80-2 C 8	111,3	301,4	23650	42	1x2	800	680	1540	4,44	32	316	54,0	42
SCIROCCO C 80-3 A 8	143,1	226,1	41100	44	1x3	800	680	2310	6,66	24	392	42,0	35
SCIROCCO C 80-3 B 8	164,5	339,1	38100	44	1x3	800	680	2310	6,66	36	428	54,0	42
SCIROCCO C 80-3 C 8	167,9	452,2	35500	44	1x3	800	680	2310	6,66	48	465	54,0	42
SCIROCCO C 80-4 A 8	193,9	301,4	54800	45	1x4	800	680	3080	8,88	32	515	54,0	42
SCIROCCO C 80-4 B 8	219,8	452,2	50750	45	1x4	800	680	3080	8,88	48	564	64,0	54
SCIROCCO C 80-4 C 8	222,8	602,9	47350	45	1x4	800	680	3080	8,88	63	613	76,0	64
SCIROCCO C 80-5 A 8	241,2	376,8	68500	46	1x5	800	680	3850	11,1	40	640	54,0	42
SCIROCCO C 80-5 B 8	272,4	565,2	63450	46	1x5	800	680	3850	11,1	59	701	64,0	54
SCIROCCO C 80-5 C 8	275,7	753,6	59150	46	1x5	800	680	3850	11,1	79	762	76,0	64
SCIROCCO C 80-2.2 A 8	192,5	300,7	54800	45	2x2	800	680	3080	8,88	32	504	42,0	35
SCIROCCO C 80-2.2 B 8	219,3	451,8	50750	45	2x2	800	680	3080	8,88	48	553	42,0	35
SCIROCCO C 80-2.2 C 8	222,6	602,9	47350	45	2x2	800	680	3080	8,88	63	601	54,0	42
SCIROCCO C 80-3.2 A 8	286,1	452,2	82150	47	2x3	800	680	4620	13,32	48	741	42,0	35
SCIROCCO C 80-3.2 B 8	329,1	678,2	76150	47	2x3	800	680	4620	13,32	71	814	54,0	42
SCIROCCO C 80-3.2 C 8	335,8	904,3	71000	47	2x3	800	680	4620	13,32	95	887	54,0	42
SCIROCCO C 80-4.2 A 8	387,7	602,9	109550	48	2x4	800	680	6160	17,76	63	976	54,0	42
SCIROCCO C 80-4.2 B 8	439,7	904,3	101550	48	2x4	800	680	6160	17,76	95	1074	64,0	54
SCIROCCO C 80-4.2 C 8	445,6	1205,7	94650	48	2x4	800	680	6160	17,76	126	1171	76,0	64
SCIROCCO C 80-5.2 A 8	482,4	753,6	136950	48	2x5	800	680	7700	22,2	79	1213	54,0	42
SCIROCCO C 80-5.2 B 8	544,8	1130,4	126950	48	2x5	800	680	7700	22,2	118	1335	64,0	54
SCIROCCO C 80-5.2 C 8	551,5	1507,2	118300	48	2x5	800	680	7700	22,2	158	1456	76,0	64
SCIROCCO C 80-6.2 A 8	572,6	904,3	164350	50	2x6	800	680	9240	26,64	95	1449	54,0	42
SCIROCCO C 80-6.2 B 8	658,4	1356,5	152300	49	2x6	800	680	9240	26,64	142	1595	64,0	54
SCIROCCO C 80-6.2 C 8	671,8	1808,6	142000	49	2x6	800	680	9240	26,64	189	1741	76,0	64
SCIROCCO C 80-7.2 A 8	675,7	1055	191750	51	2x7	800	680	10780	31,08	110	1684	76,0	64
SCIROCCO C 80-7.2 B 8	770,3	1582,5	177700	50	2x7	800	680	10780	31,08	165	1855	89,0	76
SCIROCCO C 80-7.2 C 8	782,5	2110	165650	50	2x7	800	680	10780	31,08	220	2025	89,0	76
SCIROCCO C 80-8.2 A 8	776,1	1205,7	219100	51	2x8	800	680	12320	35,52	126	1921	76,0	64
SCIROCCO C 80-8.2 B 8	879,8	1808,6	203100	50	2x8	800	680	12320	35,52	189	2116	89,0	76
SCIROCCO C 80-8.2 C 8	891,6	2411,5	189300	50	2x8	800	680	12320	35,52	252	2310	89,0	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 80

Table-type condenser



Ø 800 mm


FAN SIZE

55 ÷ 1000 kW


DT 15K CAPACITY

1 ÷ 12


NUMBER OF FANS




SCIROCCO-L 80-1




SCIROCCO-L 80-2.2




SCIROCCO-L 80-2




SCIROCCO-L 80-3.2




SCIROCCO-L 80-3



SCIROCCO-L 80-4.2




SCIROCCO-L 80-4



SCIROCCO-L 80-5.2



SCIROCCO-L 80-5



SCIROCCO-L 80-6.2


SCIROCCO-L 80

Table-type condenser




DIMENSIONS

SCIROCCO-L 80-1/2/3/4/5

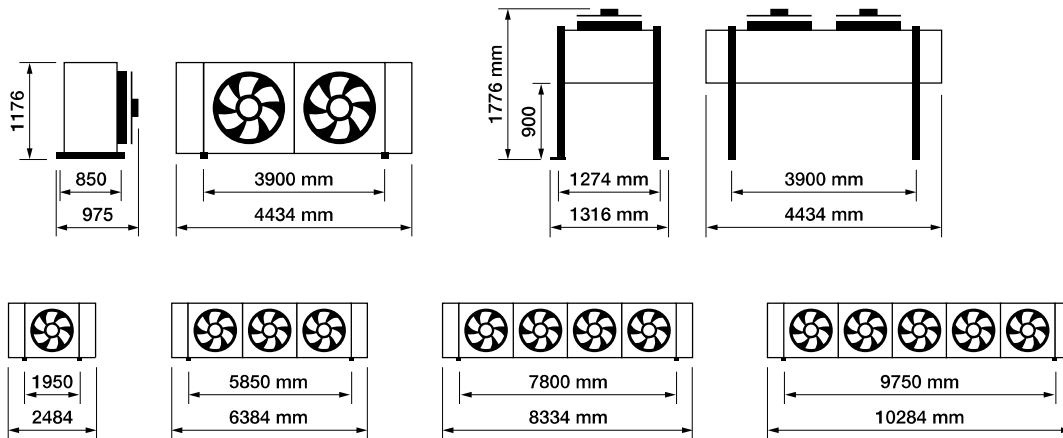

SCIROCCO-L 80-2.2/3.2/4.2/5.2/6.2

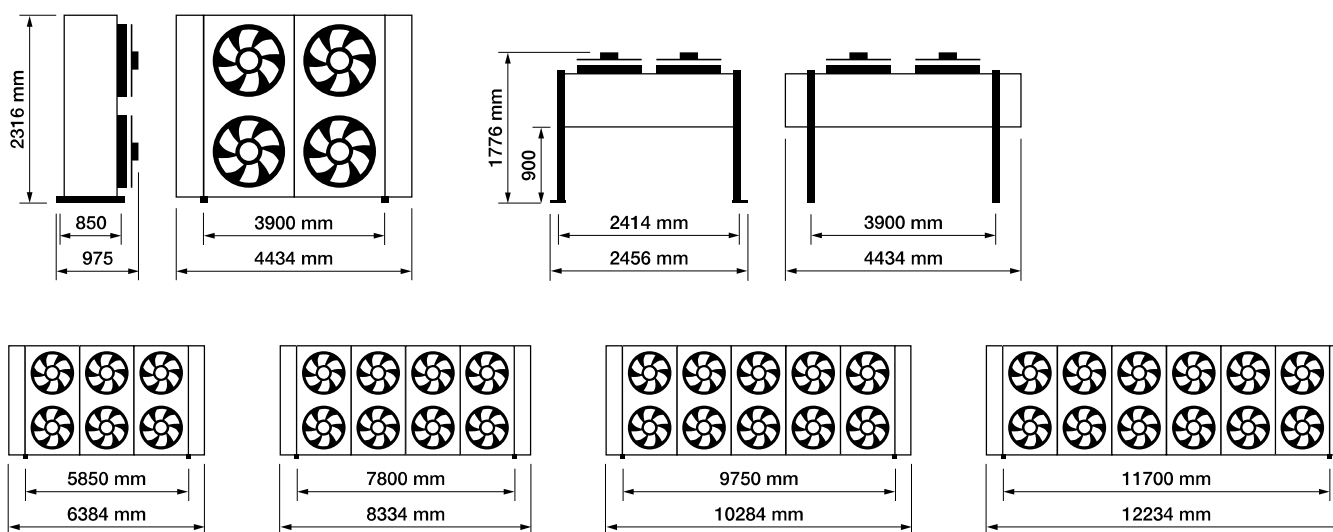

SELECTION CODE

SCIROCCO L C 80 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil lenght L = L coil lenght XL = XL coil lenght
C	C = condenser CO2 = gas cooler NH3 = ammonia condenser W = dry cooler
80	fan size Ø 800 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 80



Table-type condenser

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 80-1 B 6	78,2	155,2	19200	46	1x1	800	880	1720	3,9	17	188	35,0	28
SCIROCCO-L C 80-1 C 6	83,0	206,8	18300	46	1x1	800	880	1720	3,9	22	204	42,0	35
SCIROCCO-L C 80-2 B 6	155,7	310,5	38400	49	1x2	800	880	3440	7,8	33	355	54,0	42
SCIROCCO-L C 80-2 C 6	167,1	413,9	36550	49	1x2	800	880	3440	7,8	44	388	54,0	42
SCIROCCO-L C 80-3 B 6	235,2	465,7	57600	51	1x3	800	880	5160	11,7	49	523	64,0	54
SCIROCCO-L C 80-3 C 6	249,6	620,9	54850	51	1x3	800	880	5160	11,7	65	574	76,0	64
SCIROCCO-L C 80-4 B 6	311,4	620,9	76800	52	1x4	800	880	6880	15,6	65	691	64,0	54
SCIROCCO-L C 80-4 C 6	334,4	827,9	73150	52	1x4	800	880	6880	15,6	87	758	76,0	64
SCIROCCO-L C 80-5 B 6	392,2	776,1	96000	52	1x5	800	880	8600	19,5	81	859	89,0	76
SCIROCCO-L C 80-5 C 6	417,8	1034,9	91400	52	1x5	800	880	8600	19,5	108	943	89,0	76
SCIROCCO-L C 80-2.2 B 6	311,3	620,9	76800	52	2x2	800	880	6880	15,6	65	671	54,0	42
SCIROCCO-L C 80-2.2 C 6	334,3	827,9	73150	52	2x2	800	880	6880	15,6	87	738	54,0	42
SCIROCCO-L C 80-3.2 B 6	470,4	931,4	115200	53	2x3	800	880	10320	23,4	98	992	64,0	54
SCIROCCO-L C 80-3.2 C 6	499,2	1241,8	109700	53	2x3	800	880	10320	23,4	130	1092	76,0	64
SCIROCCO-L C 80-4.2 B 6	622,8	1241,8	153600	54	2x4	800	880	13760	31,2	130	1311	64,0	54
SCIROCCO-L C 80-4.2 C 6	668,7	1655,8	146250	54	2x4	800	880	13760	31,2	173	1445	76,0	64
SCIROCCO-L C 80-5.2 B 6	784,3	1552,3	191950	55	2x5	800	880	17200	39	162	1631	89,0	76
SCIROCCO-L C 80-5.2 C 6	835,6	2069,7	182850	55	2x5	800	880	17200	39	216	1799	89,0	76
SCIROCCO-L C 80-6.2 B 6	941,4	1862,7	230350	56	2x6	800	880	20640	46,8	195	1951	89,0	76
SCIROCCO-L C 80-6.2 C 6	998,8	2483,7	219400	56	2x6	800	880	20640	46,8	259	2151	89,0	76

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 80-1 A 8	55,4	103,2	14700	39	1x1	800	680	770	2,22	11	171	28,0	22
SCIROCCO-L C 80-1 B 8	62,5	155,2	13950	39	1x1	800	680	770	2,22	17	188	35,0	28
SCIROCCO-L C 80-1 C 8	63,6	206,8	13350	39	1x1	800	680	770	2,22	22	204	42,0	35
SCIROCCO-L C 80-2 A 8	108,8	207	29350	42	1x2	800	680	1540	4,44	22	322	42,0	35
SCIROCCO-L C 80-2 B 8	124,5	310,5	27900	42	1x2	800	680	1540	4,44	33	355	54,0	42
SCIROCCO-L C 80-2 C 8	127,9	413,9	26650	42	1x2	800	680	1540	4,44	44	388	54,0	42
SCIROCCO-L C 80-3 A 8	167,5	310,5	44050	44	1x3	800	680	2310	6,66	33	473	54,0	42
SCIROCCO-L C 80-3 B 8	187,8	465,7	41900	44	1x3	800	680	2310	6,66	49	523	64,0	54
SCIROCCO-L C 80-3 C 8	191,0	620,9	40000	44	1x3	800	680	2310	6,66	65	574	76,0	64
SCIROCCO-L C 80-4 A 8	217,6	413,9	58700	45	1x4	800	680	3080	8,88	44	624	54,0	42
SCIROCCO-L C 80-4 B 8	249,2	620,9	55850	45	1x4	800	680	3080	8,88	65	691	64,0	54
SCIROCCO-L C 80-4 C 8	255,9	827,9	53300	45	1x4	800	680	3080	8,88	87	758	76,0	64
SCIROCCO-L C 80-5 A 8	277,3	517,4	73400	45	1x5	800	680	3850	11,1	54	776	76,0	64
SCIROCCO-L C 80-5 B 8	313,2	776,1	69800	45	1x5	800	680	3850	11,1	81	859	89,0	76
SCIROCCO-L C 80-5 C 8	319,5	1034,9	66650	45	1x5	800	680	3850	11,1	108	943	89,0	76
SCIROCCO-L C 80-2.2 A 8	217,5	413,9	58700	45	2x2	800	680	3080	8,88	44	604	42,0	35
SCIROCCO-L C 80-2.2 B 8	249,1	620,9	55850	45	2x2	800	680	3080	8,88	65	671	54,0	42
SCIROCCO-L C 80-2.2 C 8	255,8	827,9	53300	45	2x2	800	680	3080	8,88	87	738	54,0	42
SCIROCCO-L C 80-3.2 A 8	335,1	620,9	88100	46	2x3	800	680	4620	13,32	65	891	54,0	42
SCIROCCO-L C 80-3.2 B 8	375,7	931,4	83750	46	2x3	800	680	4620	13,32	98	992	64,0	54
SCIROCCO-L C 80-3.2 C 8	382,0	1241,8	79950	46	2x3	800	680	4620	13,32	130	1092	76,0	64
SCIROCCO-L C 80-4.2 A 8	435,2	827,9	117450	47	2x4	800	680	6160	17,76	87	1177	54,0	42
SCIROCCO-L C 80-4.2 B 8	498,4	1241,8	111650	47	2x4	800	680	6160	17,76	130	1311	64,0	54
SCIROCCO-L C 80-4.2 C 8	511,7	1655,8	106600	47	2x4	800	680	6160	17,76	173	1445	76,0	64
SCIROCCO-L C 80-5.2 A 8	554,6	1034,9	146800	48	2x5	800	680	7700	22,2	108	1464	76,0	64
SCIROCCO-L C 80-5.2 B 8	626,4	1552,3	139600	48	2x5	800	680	7700	22,2	162	1631	89,0	76
SCIROCCO-L C 80-5.2 C 8	638,9	2069,7	133250	48	2x5	800	680	7700	22,2	216	1799	89,0	76
SCIROCCO-L C 80-6.2 A 8	670,6	1241,8	176150	49	2x6	800	680	9240	26,64	130	1750	76,0	64
SCIROCCO-L C 80-6.2 B 8	751,7	1862,7	167500	49	2x6	800	680	9240	26,64	195	1951	89,0	76
SCIROCCO-L C 80-6.2 C 8	764,3	2483,7	159900	49	2x6	800	680	9240	26,64	259	2151	89,0	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 90

Table-type condenser



Ø 900 mm


FAN SIZE

46 ÷ 1430 kW


DT 15K CAPACITY

1 ÷ 12


NUMBER OF FANS




SCIROCCO-L 90-1




SCIROCCO-L 90-2.2




SCIROCCO-L 90-2




SCIROCCO-L 90-3.2




SCIROCCO-L 90-3




SCIROCCO-L 90-4.2




SCIROCCO-L 90-4



SCIROCCO-L 90-5.2



SCIROCCO-L 90-5



SCIROCCO-L 90-6.2


SCIROCCO-L 90

Table-type condenser




DIMENSIONS

SCIROCCO-L 90-1/2/3/4/5

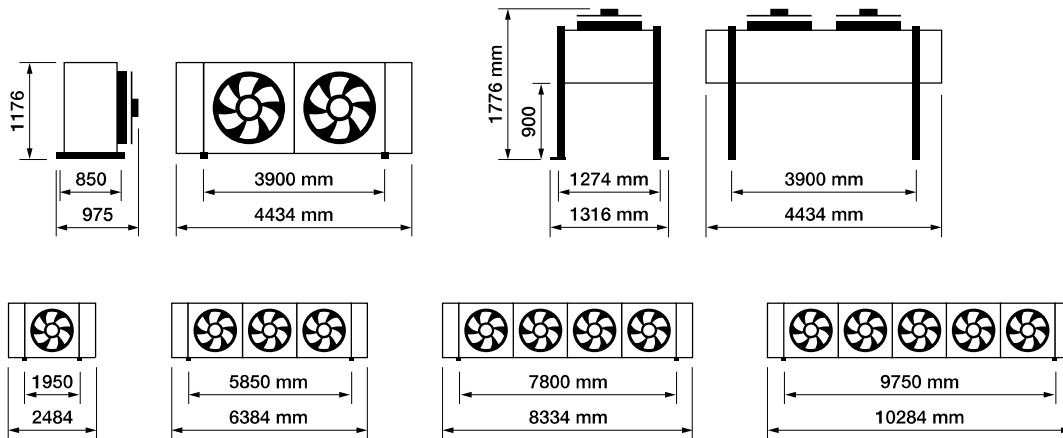

SCIROCCO-L 90-2.2/3.2/4.2/5.2/6.2

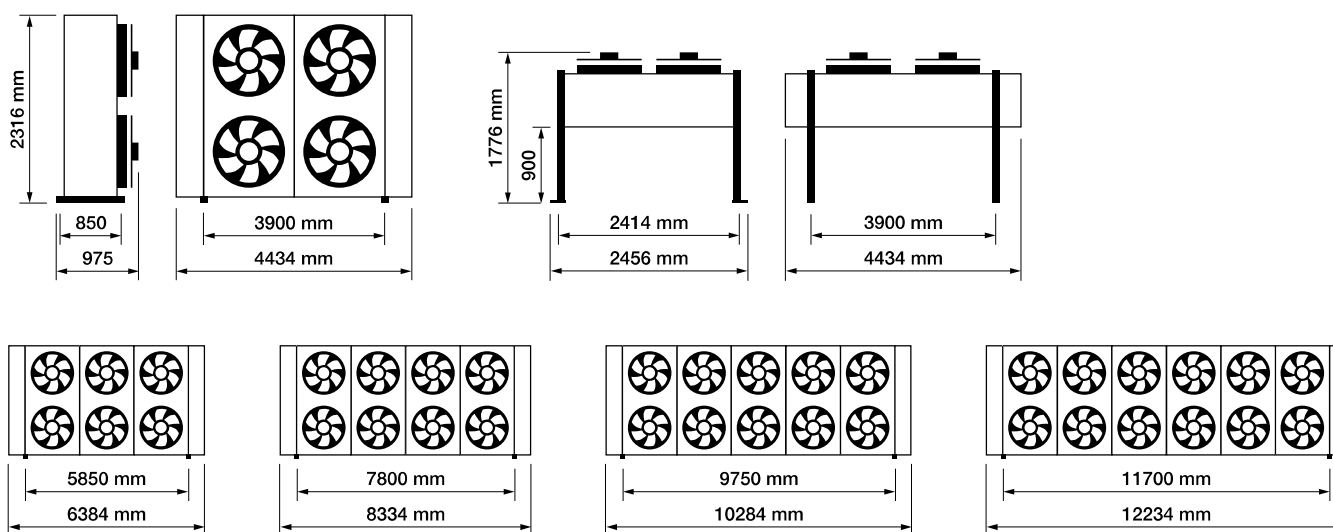

SELECTION CODE

SCIROCCO L C 90 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil lenght L = L coil lenght XL = XL coil lenght
C	C = condenser CO₂ = gas cooler NH₃ = ammonia condenser W = dry cooler
90	fan size Ø 900 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 90



Table-type condenser

3 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 90-1 B 4 D H	107,7	155,2	30200	60	1x1	900	1260	4600	7,8	17	188	35	28
SCIROCCO-L C 90-1 C 4 D H	129,0	206,8	28550	60	1x1	900	1260	4600	7,8	22	204	42	35
SCIROCCO-L C 90-2 B 4 D H	215,4	310,5	60450	63	1x2	900	1260	9200	15,6	33	355	54	42
SCIROCCO-L C 90-2 C 4 D H	241,2	413,9	57100	63	1x2	900	1260	9200	15,6	44	388	54	42
SCIROCCO-L C 90-3 B 4 D H	324,1	465,7	90650	65	1x3	900	1260	13800	23,4	49	523	64	54
SCIROCCO-L C 90-3 C 4 D H	358,5	620,9	85650	65	1x3	900	1260	13800	23,4	65	574	76	64
SCIROCCO-L C 90-4 B 4 D H	431,0	620,9	120850	66	1x4	900	1260	18400	31,2	65	691	64	54
SCIROCCO-L C 90-4 C 4 D H	482,5	827,9	114200	66	1x4	900	1260	18400	31,2	87	758	76	64
SCIROCCO-L C 90-5 B 4 D H	542,2	776,1	151050	66	1x5	900	1260	23000	39	81	859	89	76
SCIROCCO-L C 90-5 C 4 D H	602,1	1034,9	142750	66	1x5	900	1260	23000	39	108	943	89	76
SCIROCCO-L C 90-2.2 B 4 D H	430,8	620,9	120850	66	2x2	900	1260	18400	31,2	65	671	54	42
SCIROCCO-L C 90-2.2 C 4 D H	482,3	827,9	114200	66	2x2	900	1260	18400	31,2	87	738	54	42
SCIROCCO-L C 90-3.2 B 4 D H	648,2	931,4	181300	67	2x3	900	1260	27600	46,8	98	992	64	54
SCIROCCO-L C 90-3.2 C 4 D H	717,0	1241,8	171300	67	2x3	900	1260	27600	46,8	130	1092	76	64
SCIROCCO-L C 90-4.2 B 4 D H	861,9	1241,8	241700	68	2x4	900	1260	36800	62,4	130	1311	64	54
SCIROCCO-L C 90-4.2 C 4 D H	965,1	1655,8	228400	68	2x4	900	1260	36800	62,4	173	1445	76	64
SCIROCCO-L C 90-5.2 B 4 D H	1084,5	1552,3	302150	69	2x5	900	1260	46000	78	162	1631	89	76
SCIROCCO-L C 90-5.2 C 4 D H	1204,2	2069,7	285500	69	2x5	900	1260	46000	78	216	1799	89	76
SCIROCCO-L C 90-6.2 B 4 D H	1297,7	1862,7	362550	70	2x6	900	1260	55200	93,6	195	1951	89	76
SCIROCCO-L C 90-6.2 C 4 D H	1435,1	2483,7	342600	70	2x6	900	1260	55200	93,6	259	2151	89	76

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 90-1 B 6 D H	92,6	155,2	24050	52	1x1	900	885	2260	5,15	17	188	35	28
SCIROCCO-L C 90-1 C 6 D H	99,0	206,8	22500	52	1x1	900	885	2260	5,15	22	204	42	35
SCIROCCO-L C 90-2 B 6 D H	184,4	310,5	48100	55	1x2	900	885	4520	10,3	33	355	54	42
SCIROCCO-L C 90-2 C 6 D H	199,9	413,9	45000	55	1x2	900	885	4520	10,3	44	388	54	42
SCIROCCO-L C 90-3 B 6 D H	278,8	465,7	72100	57	1x3	900	885	6780	15,45	49	523	64	54
SCIROCCO-L C 90-3 C 6 D H	297,9	620,9	67500	57	1x3	900	885	6780	15,45	65	574	76	64
SCIROCCO-L C 90-4 B 6 D H	369,8	620,9	96150	58	1x4	900	885	9040	20,6	65	691	64	54
SCIROCCO-L C 90-4 C 6 D H	399,9	827,9	90050	58	1x4	900	885	9040	20,6	87	758	76	64
SCIROCCO-L C 90-5 B 6 D H	465,4	776,1	120200	58	1x5	900	885	11300	25,75	81	859	89	76
SCIROCCO-L C 90-5 C 6 D H	499,3	1034,9	112550	58	1x5	900	885	11300	25,75	108	943	89	76
SCIROCCO-L C 90-2.2 B 6 D H	370,4	620,9	96150	58	2x2	900	885	9040	20,6	65	671	54	42
SCIROCCO-L C 90-2.2 C 6 D H	399,6	827,9	90050	58	2x2	900	885	9040	20,6	87	738	54	42
SCIROCCO-L C 90-3.2 B 6 D H	557,5	931,4	144250	59	2x3	900	885	13560	30,9	98	992	64	54
SCIROCCO-L C 90-3.2 C 6 D H	595,7	1241,8	135050	59	2x3	900	885	13560	30,9	130	1092	76	64
SCIROCCO-L C 90-4.2 B 6 D H	739,5	1241,8	192300	60	2x4	900	885	18080	41,2	130	1311	64	54
SCIROCCO-L C 90-4.2 C 6 D H	799,7	1655,8	180050	60	2x4	900	885	18080	41,2	173	1445	76	64
SCIROCCO-L C 90-5.2 B 6 D H	930,9	1552,3	240400	61	2x5	900	885	22600	51,5	162	1631	89	76
SCIROCCO-L C 90-5.2 C 6 D H	998,7	2069,7	225100	61	2x5	900	885	22600	51,5	216	1799	89	76
SCIROCCO-L C 90-6.2 B 6 D H	1115,7	1862,7	288450	62	2x6	900	885	55200	93,6	195	1951	89	76
SCIROCCO-L C 90-6.2 C 6 D H	1192,2	2483,7	270100	62	2x6	900	885	55200	93,6	259	2151	89	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 90



Table-type condenser

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 90-1 A 8	62,1	103,2	17200	41	1x1	900	670	830	2,27	11	171	28	22
SCIROCCO-L C 90-1 B 8	70,5	155,2	16100	41	1x1	900	670	830	2,27	17	188	35	28
SCIROCCO-L C 90-1 C 8	71,5	206,8	15150	41	1x1	900	670	830	2,27	22	204	42	35
SCIROCCO-L C 90-2 A 8	122,0	207	34450	44	1x2	900	670	1660	4,54	22	322	42	35
SCIROCCO-L C 90-2 B 8	140,6	310,5	32200	44	1x2	900	670	1660	4,54	33	355	54	42
SCIROCCO-L C 90-2 C 8	144,0	413,9	30250	44	1x2	900	670	1660	4,54	44	388	54	42
SCIROCCO-L C 90-3 A 8	187,9	310,5	51650	46	1x3	900	670	2490	6,81	33	473	54	42
SCIROCCO-L C 90-3 B 8	211,9	465,7	48300	46	1x3	900	670	2490	6,81	49	523	64	54
SCIROCCO-L C 90-3 C 8	214,8	620,9	45400	46	1x3	900	670	2490	6,81	65	574	76	64
SCIROCCO-L C 90-4 A 8	244,2	413,9	68900	47	1x4	900	670	3320	9,08	44	624	54	42
SCIROCCO-L C 90-4 B 8	281,2	620,9	64400	47	1x4	900	670	3320	9,08	65	691	64	54
SCIROCCO-L C 90-4 C 8	288,0	827,9	60500	47	1x4	900	670	3320	9,08	87	758	76	64
SCIROCCO-L C 90-5 A 8	311,3	517,4	86100	47	1x5	900	670	4150	11,35	54	776	76	64
SCIROCCO-L C 90-5 B 8	353,5	776,1	80500	47	1x5	900	670	4150	11,35	81	859	89	76
SCIROCCO-L C 90-5 C 8	359,6	1034,9	75650	47	1x5	900	670	4150	11,35	108	943	89	76
SCIROCCO-L C 90-2.2 A 8	244,1	413,9	68900	47	2x2	900	670	3320	9,08	44	604	42	35
SCIROCCO-L C 90-2.2 B 8	281,1	620,9	64400	47	2x2	900	670	3320	9,08	65	671	54	42
SCIROCCO-L C 90-2.2 C 8	287,9	827,9	60500	47	2x2	900	670	3320	9,08	87	738	54	42
SCIROCCO-L C 90-3.2 A 8	375,8	620,9	103350	48	2x3	900	670	4980	13,62	65	891	54	42
SCIROCCO-L C 90-3.2 B 8	423,8	931,4	96600	48	2x3	900	670	4980	13,62	98	992	64	54
SCIROCCO-L C 90-3.2 C 8	429,6	1241,8	90800	48	2x3	900	670	4980	13,62	130	1092	76	64
SCIROCCO-L C 90-4.2 A 8	488,4	827,9	137800	49	2x4	900	670	6640	18,16	87	1177	54	42
SCIROCCO-L C 90-4.2 B 8	562,4	1241,8	128800	49	2x4	900	670	6640	18,16	130	1311	64	54
SCIROCCO-L C 90-4.2 C 8	576,0	1655,8	121050	49	2x4	900	670	6640	18,16	173	1445	76	64
SCIROCCO-L C 90-5.2 A 8	622,5	1034,9	172250	50	2x5	900	670	8300	22,7	108	1464	76	64
SCIROCCO-L C 90-5.2 B 8	707,1	1552,3	161000	50	2x5	900	670	8300	22,7	162	1631	89	76
SCIROCCO-L C 90-5.2 C 8	719,2	2069,7	151300	50	2x5	900	670	8300	22,7	216	1799	89	76
SCIROCCO-L C 90-6.2 A 8	752,2	1241,8	206650	51	2x6	900	670	9960	27,24	130	1750	76	64
SCIROCCO-L C 90-6.2 B 8	848,0	1862,7	193150	51	2x6	900	670	9960	27,24	195	1951	89	76
SCIROCCO-L C 90-6.2 C 8	859,6	2483,7	181550	51	2x6	900	670	9960	27,24	259	2151	89	76

3 PH 12 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 90-1 A 12	45,7	103,2	10900	30	1x1	900	440	280	0,83	11	171	28	22
SCIROCCO-L C 90-1 B 12	47,8	155,2	10150	30	1x1	900	440	280	0,83	17	188	35	28
SCIROCCO-L C 90-2 A 12	89,8	207	21800	33	1x2	900	440	560	1,66	22	322	42	35
SCIROCCO-L C 90-2 B 12	95,4	310,5	20300	33	1x2	900	440	560	1,66	33	355	54	42
SCIROCCO-L C 90-3 A 12	137,8	310,5	32700	35	1x3	900	440	840	2,49	33	473	54	42
SCIROCCO-L C 90-3 B 12	143,6	465,7	30400	35	1x3	900	440	840	2,49	49	523	64	54
SCIROCCO-L C 90-4 A 12	179,6	413,9	43600	36	1x4	900	440	1120	3,32	44	624	54	42
SCIROCCO-L C 90-4 B 12	190,9	620,9	40550	36	1x4	900	440	1120	3,32	65	691	64	54
SCIROCCO-L C 90-5 A 12	228,2	517,4	54550	36	1x5	900	440	1400	4,15	54	776	76	64
SCIROCCO-L C 90-5 B 12	239,5	776,1	50700	36	1x5	900	440	1400	4,15	81	859	89	76
SCIROCCO-L C 90-2.2 A 12	179,5	413,9	43600	36	2x2	900	440	1120	3,32	44	604	42	35
SCIROCCO-L C 90-2.2 B 12	190,9	620,9	40550	36	2x2	900	440	1120	3,32	65	671	54	42
SCIROCCO-L C 90-3.2 A 12	275,6	620,9	65450	37	2x3	900	440	1680	4,98	65	891	54	42
SCIROCCO-L C 90-3.2 B 12	287,2	931,4	60850	37	2x3	900	440	1680	4,98	98	992	64	54
SCIROCCO-L C 90-4.2 A 12	359,1	827,9	87250	38	2x4	900	440	2240	6,64	87	1177	54	42
SCIROCCO-L C 90-4.2 B 12	381,8	1241,8	81100	38	2x4	900	440	2240	6,64	130	1311	64	54
SCIROCCO-L C 90-5.2 A 12	456,5	1034,9	109050	39	2x5	900	440	2800	8,3	108	1464	76	64
SCIROCCO-L C 90-5.2 B 12	478,9	1552,3	101400	39	2x5	900	440	2800	8,3	162	1631	89	76
SCIROCCO-L C 90-6.2 A 12	551,5	1241,8	130900	40	2x6	900	440	3360	9,96	130	1750	76	64
SCIROCCO-L C 90-6.2 B 12	574,6	1862,7	121700	40	2x6	900	440	3360	9,96	195	1951	89	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-XL 90

Table-type condenser



Ø 900 mm


FAN SIZE

48 ÷ 1300 kW


DT 15K CAPACITY

1 ÷ 10


NUMBER OF FANS




SCIROCCO-XL 90-1




SCIROCCO-XL 90-2




SCIROCCO-XL 90-3




SCIROCCO-XL 90-4




SCIROCCO-XL 90-5




SCIROCCO-XL 90-2.2



SCIROCCO-XL 90-3.2



SCIROCCO-XL 90-4.2



SCIROCCO-XL 90-5.2


SCIROCCO-XL 90

Table-type condenser




DIMENSIONS

SCIROCCO-XL 90-1/2/3/4/5

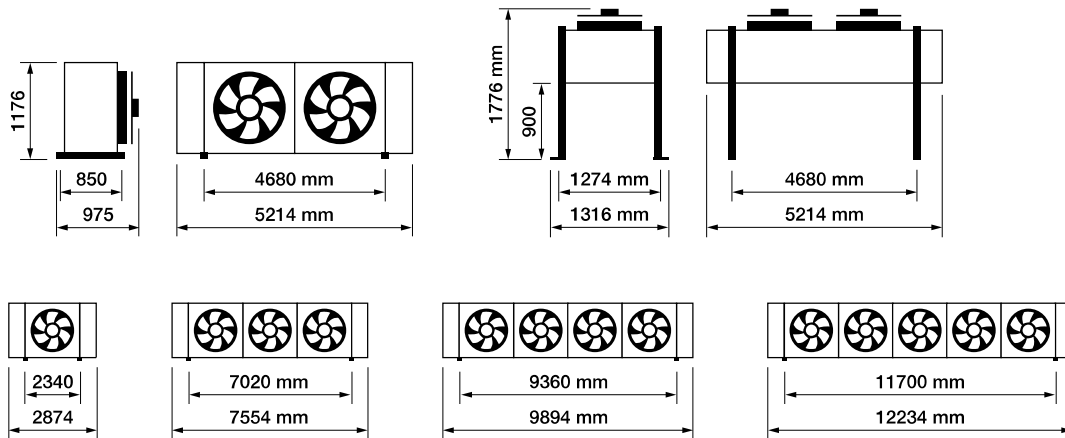

SCIROCCO-XL 90-2.2/3.2/4.2/5.2

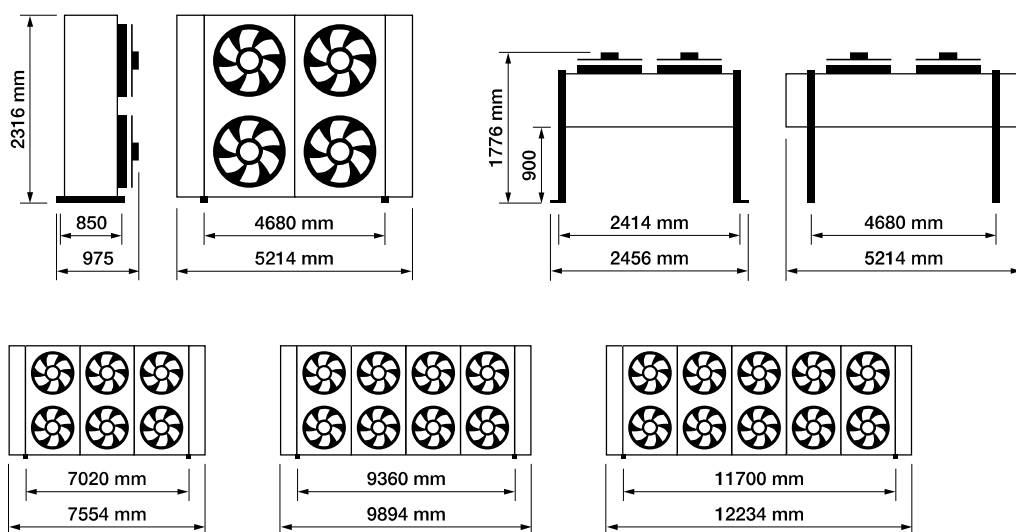

SELECTION CODE

SCIROCCO L C 90 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil length L = L coil length XL = XL coil length
C	C = condenser CO₂ = gas cooler NH₃ = ammonia condenser W = dry cooler
90	fan size Ø 900 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-XL 90



Table-type condenser

3 PH 4 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-XL C 90-1 B 4 D H	118,0	186,1	31750	60	1x1	900	1260	4600	7,8	20	211	42	35
SCIROCCO-XL C 90-1 C 4 D H	130,9	248,4	30350	60	1x1	900	1260	4600	7,8	26	231	54	42
SCIROCCO-XL C 90-2 B 4 D H	236,7	372,5	63450	63	1x2	900	1260	9200	15,6	39	402	64	54
SCIROCCO-XL C 90-2 C 4 D H	262,0	496,7	60650	63	1x2	900	1260	9200	15,6	52	442	76	64
SCIROCCO-XL C 90-3 B 4 D H	350,9	558,8	95200	65	1x3	900	1260	13800	23,4	59	593	64	54
SCIROCCO-XL C 90-3 C 4 D H	385,9	745,1	91000	65	1x3	900	1260	13800	23,4	78	654	76	64
SCIROCCO-XL C 90-4 B 4 D H	473,6	745,1	126950	66	1x4	900	1260	18400	31,2	78	784	89	76
SCIROCCO-XL C 90-4 C 4 D H	524,4	993,5	121300	66	1x4	900	1260	18400	31,2	104	865	89	76
SCIROCCO-XL C 90-5 B 4 D H	591,4	931,4	158700	66	1x5	900	1260	23000	39	98	976	89	76
SCIROCCO-XL C 90-5 C 4 D H	651,2	1241,8	151650	66	1x5	900	1260	23000	39	130	1076	89	64
SCIROCCO-XL C 90-2.2 B 4 D H	473,3	745,1	126950	66	2x2	900	1260	18400	31,2	78	759	64	54
SCIROCCO-XL C 90-2.2 C 4 D H	524,1	993,5	121300	66	2x2	900	1260	18400	31,2	104	839	76	64
SCIROCCO-XL C 90-3.2 B 4 D H	701,8	1117,6	190400	67	2x3	900	1260	27600	46,8	117	1123	64	54
SCIROCCO-XL C 90-3.2 C 4 D H	771,7	1490,2	181950	67	2x3	900	1260	27600	46,8	156	1243	76	64
SCIROCCO-XL C 90-4.2 B 4 D H	947,2	1490,2	253900	68	2x4	900	1260	36800	62,4	156	1486	89	76
SCIROCCO-XL C 90-4.2 C 4 D H	1048,7	1986,9	242600	68	2x4	900	1260	36800	62,4	208	1646	89	76
SCIROCCO-XL C 90-5.2 B 4 D H	1182,9	1862,7	317350	69	2x5	900	1260	46000	78	195	1850	89	76
SCIROCCO-XL C 90-5.2 C 4 D H	1302,4	2483,7	303300	69	2x5	900	1260	46000	78	259	2051	89	76

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-XL C 90-1 B 6 D H	101,2	186,1	25400	52	1x1	900	885	2260	5,15	20	211	42	35
SCIROCCO-XL C 90-1 C 6 D H	108,8	248,4	24100	52	1x1	900	885	2260	5,15	26	231	54	42
SCIROCCO-XL C 90-2 B 6 D H	202,9	372,5	50850	55	1x2	900	885	4520	10,3	39	402	64	54
SCIROCCO-XL C 90-2 C 6 D H	217,7	496,7	48250	55	1x2	900	885	4520	10,3	52	442	76	64
SCIROCCO-XL C 90-3 B 6 D H	302,0	558,8	76250	57	1x3	900	885	6780	15,45	59	593	64	54
SCIROCCO-XL C 90-3 C 6 D H	321,9	745,1	72350	57	1x3	900	885	6780	15,45	78	654	76	64
SCIROCCO-XL C 90-4 B 6 D H	406,0	745,1	101700	58	1x4	900	885	9040	20,6	78	784	89	76
SCIROCCO-XL C 90-4 C 6 D H	435,6	993,5	96500	58	1x4	900	885	9040	20,6	104	865	89	76
SCIROCCO-XL C 90-5 B 6 D H	507,6	931,4	127100	58	1x5	900	885	11300	25,75	98	976	89	76
SCIROCCO-XL C 90-5 C 6 D H	541,8	1241,8	120600	58	1x5	900	885	11300	25,75	130	1076	89	64
SCIROCCO-XL C 90-2.2 B 6 D H	405,8	745,1	101700	58	2x2	900	885	9040	20,6	78	759	64	54
SCIROCCO-XL C 90-2.2 C 6 D H	435,4	993,5	96500	58	2x2	900	885	9040	20,6	104	839	76	64
SCIROCCO-XL C 90-3.2 B 6 D H	604,1	1117,6	152500	59	2x3	900	885	13560	30,9	117	1123	64	54
SCIROCCO-XL C 90-3.2 C 6 D H	643,8	1490,2	144750	59	2x3	900	885	13560	30,9	156	1243	76	64
SCIROCCO-XL C 90-4.2 B 6 D H	811,9	1490,2	203350	60	2x4	900	885	18080	41,2	156	1486	89	76
SCIROCCO-XL C 90-4.2 C 6 D H	871,2	1986,9	192950	60	2x4	900	885	18080	41,2	208	1646	89	76
SCIROCCO-XL C 90-5.2 B 6 D H	1015,3	1862,7	254200	61	2x5	900	885	22600	51,5	195	1850	89	76
SCIROCCO-XL C 90-5.2 C 6 D H	1083,7	2483,7	241200	61	2x5	900	885	22600	51,5	259	2051	89	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-XL 90



Table-type condenser

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-XL C 90-1 A 8	67,0	124,2	17900	41	1x1	900	670	830	2,27	13	191	28	22
SCIROCCO-XL C 90-1 B 8	75,9	186,1	17000	41	1x1	900	670	830	2,27	20	211	42	35
SCIROCCO-XL C 90-1 C 8	77,4	248,4	16150	41	1x1	900	670	830	2,27	26	231	54	42
SCIROCCO-XL C 90-2 A 8	134,2	248,4	35800	44	1x2	900	670	1660	4,54	26	362	54	42
SCIROCCO-XL C 90-2 B 8	151,9	372,5	33950	44	1x2	900	670	1660	4,54	39	402	64	54
SCIROCCO-XL C 90-2 C 8	155,0	496,7	32350	44	1x2	900	670	1660	4,54	52	442	76	64
SCIROCCO-XL C 90-3 A 8	203,0	372,5	53650	46	1x3	900	670	2490	6,81	39	533	54	42
SCIROCCO-XL C 90-3 B 8	226,8	558,8	50950	46	1x3	900	670	2490	6,81	59	593	64	54
SCIROCCO-XL C 90-3 C 8	230,0	745,1	48500	46	1x3	900	670	2490	6,81	78	654	76	64
SCIROCCO-XL C 90-4 A 8	268,5	496,7	71550	47	1x4	900	670	3320	9,08	52	704	76	64
SCIROCCO-XL C 90-4 B 8	304,0	745,1	67900	47	1x4	900	670	3320	9,08	78	784	89	76
SCIROCCO-XL C 90-4 C 8	310,0	993,5	64650	47	1x4	900	670	3320	9,08	104	865	89	76
SCIROCCO-XL C 90-5 A 8	339,1	620,9	89450	47	1x5	900	670	4150	11,35	65	876	76	64
SCIROCCO-XL C 90-5 B 8	380,2	931,4	84900	47	1x5	900	670	4150	11,35	98	976	89	76
SCIROCCO-XL C 90-5 C 8	386,1	1241,8	80850	47	1x5	900	670	4150	11,35	130	1076	89	64
SCIROCCO-XL C 90-2.2 A 8	268,4	496,7	71550	47	2x2	900	670	3320	9,08	52	678	54	42
SCIROCCO-XL C 90-2.2 B 8	303,9	745,1	67900	47	2x2	900	670	3320	9,08	78	759	64	54
SCIROCCO-XL C 90-2.2 C 8	309,9	993,5	64650	47	2x2	900	670	3320	9,08	104	839	76	64
SCIROCCO-XL C 90-3.2 A 8	406,1	745,1	107350	48	2x3	900	670	4980	13,62	78	1002	54	42
SCIROCCO-XL C 90-3.2 B 8	453,5	1117,6	101850	48	2x3	900	670	4980	13,62	117	1123	64	54
SCIROCCO-XL C 90-3.2 C 8	460,0	1490,2	97000	48	2x3	900	670	4980	13,62	156	1243	76	64
SCIROCCO-XL C 90-4.2 A 8	537,0	993,5	143100	49	2x4	900	670	6640	18,16	104	1325	76	64
SCIROCCO-XL C 90-4.2 B 8	608,0	1490,2	135800	49	2x4	900	670	6640	18,16	156	1486	89	76
SCIROCCO-XL C 90-4.2 C 8	620,0	1986,9	129350	49	2x4	900	670	6640	18,16	208	1646	89	76
SCIROCCO-XL C 90-5.2 A 8	678,2	1241,8	178900	50	2x5	900	670	8300	22,7	130	1649	76	64
SCIROCCO-XL C 90-5.2 B 8	760,3	1862,7	169750	50	2x5	900	670	8300	22,7	195	1850	89	76
SCIROCCO-XL C 90-5.2 C 8	772,2	2483,7	161700	50	2x5	900	670	8300	22,7	259	2051	89	76

3 PH 12 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-XL C 90-1 A 12	48,7	124,2	11350	30	1x1	900	440	280	0,83	13	191	28	22
SCIROCCO-XL C 90-1 B 12	51,1	186,1	10750	30	1x1	900	440	280	0,83	20	211	42	35
SCIROCCO-XL C 90-2 A 12	97,4	248,4	22750	33	1x2	900	440	560	1,66	26	362	54	42
SCIROCCO-XL C 90-2 B 12	102,4	372,5	21500	33	1x2	900	440	560	1,66	39	402	64	54
SCIROCCO-XL C 90-3 A 12	147,5	372,5	34100	35	1x3	900	440	840	2,49	39	533	54	42
SCIROCCO-XL C 90-3 B 12	153,0	558,8	32250	35	1x3	900	440	840	2,49	59	593	64	54
SCIROCCO-XL C 90-4 A 12	194,8	496,7	45500	36	1x4	900	440	1120	3,32	52	704	76	64
SCIROCCO-XL C 90-4 B 12	204,8	745,1	42950	36	1x4	900	440	1120	3,32	78	784	89	76
SCIROCCO-XL C 90-5 A 12	245,8	620,9	56850	36	1x5	900	440	1400	4,15	65	876	76	64
SCIROCCO-XL C 90-5 B 12	256,0	931,4	53700	36	1x5	900	440	1400	4,15	98	976	89	76
SCIROCCO-XL C 90-2.2 A 12	194,8	496,7	45500	36	2x2	900	440	1120	3,32	52	678	54	42
SCIROCCO-XL C 90-2.2 B 12	204,7	745,1	42950	36	2x2	900	440	1120	3,32	78	759	64	54
SCIROCCO-XL C 90-3.2 A 12	294,9	745,1	68250	37	2x3	900	440	1680	4,98	78	1002	54	42
SCIROCCO-XL C 90-3.2 B 12	306,0	1117,6	64450	37	2x3	900	440	1680	4,98	117	1123	64	54
SCIROCCO-XL C 90-4.2 A 12	389,7	993,5	90950	38	2x4	900	440	2240	6,64	104	1325	76	64
SCIROCCO-XL C 90-4.2 B 12	409,5	1490,2	85950	38	2x4	900	440	2240	6,64	156	1486	89	76
SCIROCCO-XL C 90-5.2 A 12	491,5	1241,8	113700	39	2x5	900	440	2800	8,3	130	1649	76	64
SCIROCCO-XL C 90-5.2 B 12	512,0	1862,7	107400	39	2x5	900	440	2800	8,3	195	1850	89	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 100

Table-type condenser



Ø 1000 mm

FAN SIZE

70 ÷ 1300 kW


DT 15K CAPACITY

1 ÷ 12


NUMBER OF FANS




SCIROCCO-L 100-1



SCIROCCO-L 100-2.2




SCIROCCO-L 100-2




SCIROCCO-L 100-3.2




SCIROCCO-L 100-3




SCIROCCO-L 100-4.2




SCIROCCO-L 100-4



SCIROCCO-L 100-5.2



SCIROCCO-L 100-5



SCIROCCO-L 100-6.2


SCIROCCO-L 100

Table-type condenser




DIMENSIONS

SCIROCCO-L 100-1/2/3/4/5

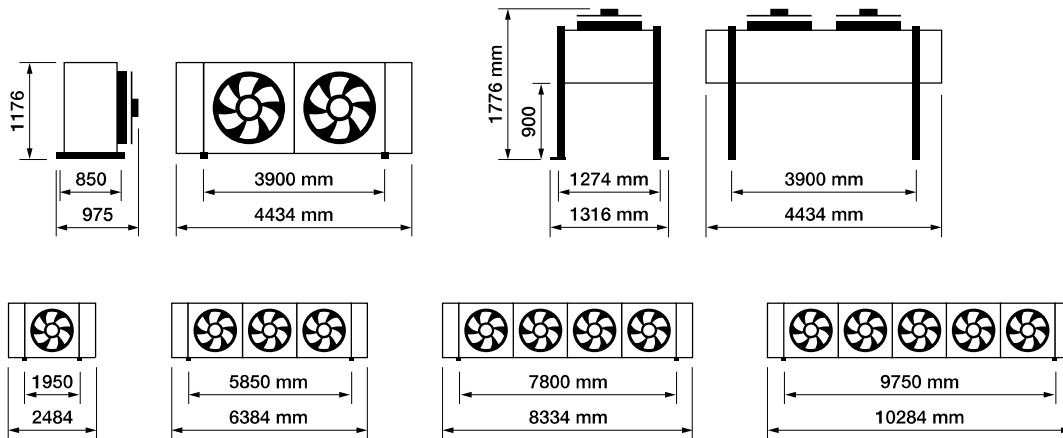

SCIROCCO-L 100-2.2/3.2/4.2/5.2/6.2

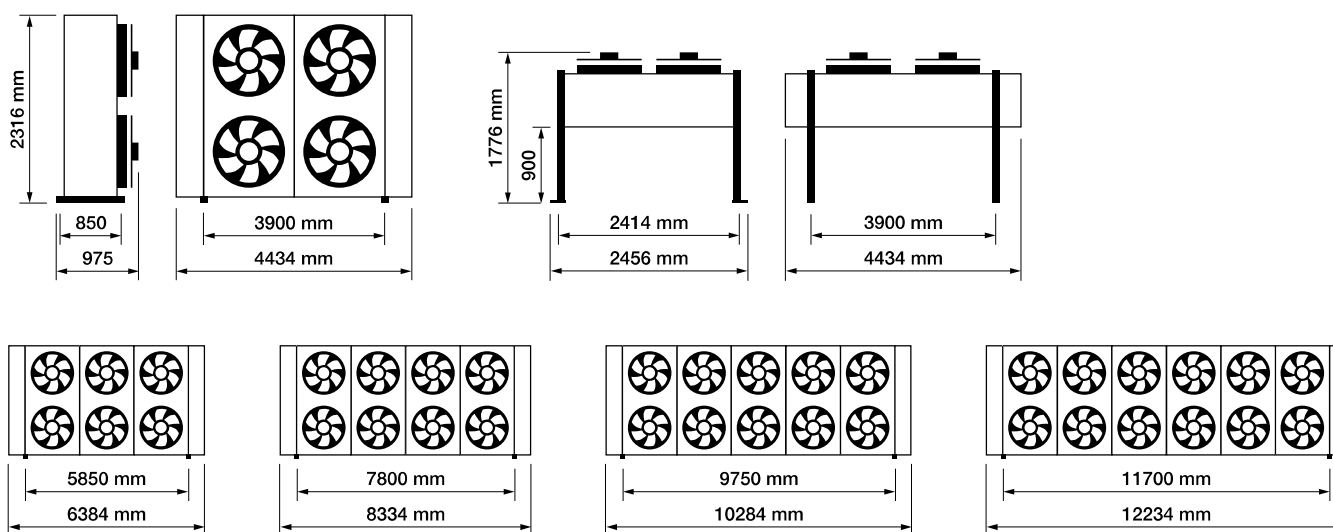

SELECTION CODE

SCIROCCO L C 100 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil length L = L coil length XL = XL coil length
C	C = condenser CO₂ = gas cooler NH₃ = ammonia condenser W = dry cooler
100	fan size Ø 1000 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-L 100



Table-type condenser

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 100-1 B 6	98,6	155,2	26200	53	1x1	1000	930	2480	5,63	17	188	35,0	28
SCIROCCO-L C 100-1 C 6	106,0	206,8	24450	53	1x1	1000	930	2480	5,63	22	204	42,0	35
SCIROCCO-L C 100-2 B 6	196,9	310,5	52400	56	1x2	1000	930	4960	11,26	33	355	54,0	42
SCIROCCO-L C 100-2 C 6	214,4	413,9	48950	56	1x2	1000	930	4960	11,26	44	388	54,0	42
SCIROCCO-L C 100-3 B 6	296,7	465,7	78650	58	1x3	1000	930	7440	16,89	49	523	64,0	54
SCIROCCO-L C 100-3 C 6	319,2	620,9	73400	58	1x3	1000	930	7440	16,89	65	574	76,0	64
SCIROCCO-L C 100-4 B 6	394,1	620,9	104850	59	1x4	1000	930	9920	22,52	65	691	64,0	54
SCIROCCO-L C 100-4 C 6	428,9	827,9	97900	59	1x4	1000	930	9920	22,52	87	758	76,0	64
SCIROCCO-L C 100-5 B 6	495,9	776,1	131050	59	1x5	1000	930	12400	28,15	81	859	89,0	76
SCIROCCO-L C 100-5 C 6	535,4	1034,9	122350	59	1x5	1000	930	12400	28,15	108	943	89,0	76
SCIROCCO-L C 100-2.2 B 6	393,9	620,9	104850	59	2x2	1000	930	9920	22,52	65	671	54,0	42
SCIROCCO-L C 100-2.2 C 6	428,7	827,9	97900	59	2x2	1000	930	9920	22,52	87	738	54,0	42
SCIROCCO-L C 100-3.2 B 6	593,5	931,4	157250	60	2x3	1000	930	14880	33,78	98	992	64,0	54
SCIROCCO-L C 100-3.2 C 6	638,3	1241,8	146800	60	2x3	1000	930	14880	33,78	130	1092	76,0	64
SCIROCCO-L C 100-4.2 B 6	788,1	1241,8	209700	61	2x4	1000	930	19840	45,04	130	1311	64,0	54
SCIROCCO-L C 100-4.2 C 6	857,8	1655,8	195750	61	2x4	1000	930	19840	45,04	173	1445	76,0	64
SCIROCCO-L C 100-5.2 B 6	991,8	1552,3	262100	62	2x5	1000	930	24800	56,3	162	1631	89,0	76
SCIROCCO-L C 100-5.2 C 6	1070,8	2069,7	244700	62	2x5	1000	930	24800	56,3	216	1799	89,0	76
SCIROCCO-L C 100-6.2 B 6	1187,9	1862,7	314550	63	2x6	1000	930	29760	67,56	195	1951	89,0	76
SCIROCCO-L C 100-6.2 C 6	1277,4	2483,7	293650	63	2x6	1000	930	29760	67,56	259	2151	89,0	76

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-L C 100-1 A 8	72,8	103,2	21850	49	1x1	1000	670	770	2,28	11	171	28,0	22
SCIROCCO-L C 100-1 B 8	84,9	155,2	20250	49	1x1	1000	670	770	2,28	17	188	35,0	28
SCIROCCO-L C 100-1 C 8	87,5	206,8	18950	49	1x1	1000	670	770	2,28	22	204	42,0	35
SCIROCCO-L C 100-2 A 8	143,6	207,0	43650	52	1x2	1000	670	1540	4,56	22	322	42,0	35
SCIROCCO-L C 100-2 B 8	169,7	310,5	40500	52	1x2	1000	670	1540	4,56	33	355	54,0	42
SCIROCCO-L C 100-2 C 8	176,7	413,9	37900	52	1x2	1000	670	1540	4,56	44	388	54,0	42
SCIROCCO-L C 100-3 A 8	220,7	310,5	65500	54	1x3	1000	670	2310	6,84	33	473	54,0	42
SCIROCCO-L C 100-3 B 8	255,4	465,7	60800	54	1x3	1000	670	2310	6,84	49	523	64,0	54
SCIROCCO-L C 100-3 C 8	263,1	620,9	56800	54	1x3	1000	670	2310	6,84	65	574	76,0	64
SCIROCCO-L C 100-4 A 8	287,4	413,9	87350	55	1x4	1000	670	3080	9,12	44	624	54,0	42
SCIROCCO-L C 100-4 B 8	339,5	620,9	81050	55	1x4	1000	670	3080	9,12	65	691	64,0	54
SCIROCCO-L C 100-4 C 8	353,4	827,9	75750	55	1x4	1000	670	3080	9,12	87	758	76,0	64
SCIROCCO-L C 100-5 A 8	366,3	517,4	109200	55	1x5	1000	670	3850	11,4	54	776	76,0	64
SCIROCCO-L C 100-5 B 8	426,8	776,1	101300	55	1x5	1000	670	3850	11,4	81	859	89,0	76
SCIROCCO-L C 100-5 C 8	441,0	1034,9	94700	55	1x5	1000	670	3850	11,4	108	943	89,0	76
SCIROCCO-L C 100-2.2 A 8	287,2	413,9	87350	55	2x2	1000	670	3080	9,12	44	604	42,0	35
SCIROCCO-L C 100-2.2 B 8	339,4	620,9	81050	55	2x2	1000	670	3080	9,12	65	671	54,0	42
SCIROCCO-L C 100-2.2 C 8	353,3	827,9	75750	55	2x2	1000	670	3080	9,12	87	738	54,0	42
SCIROCCO-L C 100-3.2 A 8	441,5	620,9	131000	56	2x3	1000	670	4620	13,68	65	891	54,0	42
SCIROCCO-L C 100-3.2 B 8	510,9	931,4	121550	56	2x3	1000	670	4620	13,68	98	992	64,0	54
SCIROCCO-L C 100-3.2 C 8	526,2	1241,8	113650	56	2x3	1000	670	4620	13,68	130	1092	76,0	64
SCIROCCO-L C 100-4.2 A 8	574,7	827,9	174700	57	2x4	1000	670	6160	18,24	87	1177	54,0	42
SCIROCCO-L C 100-4.2 B 8	679,0	1241,8	162100	57	2x4	1000	670	6160	18,24	130	1311	64,0	54
SCIROCCO-L C 100-4.2 C 8	706,8	1655,8	151550	57	2x4	1000	670	6160	18,24	173	1445	76,0	64
SCIROCCO-L C 100-5.2 A 8	732,6	1034,9	218350	58	2x5	1000	670	7700	22,8	108	1464	76,0	64
SCIROCCO-L C 100-5.2 B 8	853,5	1552,3	202600	58	2x5	1000	670	7700	22,8	162	1631	89,0	76
SCIROCCO-L C 100-5.2 C 8	882,0	2069,7	189400	58	2x5	1000	670	7700	22,8	216	1799	89,0	76
SCIROCCO-L C 100-6.2 A 8	883,8	1241,8	262050	59	2x6	1000	670	9240	27,36	130	1750	76,0	64
SCIROCCO-L C 100-6.2 B 8	1022,4	1862,7	243150	59	2x6	1000	670	9240	27,36	195	1951	89,0	76
SCIROCCO-L C 100-6.2 C 8	1052,9	2483,7	227300	59	2x6	1000	670	9240	27,36	259	2151	89,0	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.



SCIROCCO-XL 100

Table-type condenser



Ø 1000 mm

FAN SIZE

80 ÷ 1170 kW


DT 15K CAPACITY

1 ÷ 10


NUMBER OF FANS




SCIROCCO-XL 100-1




SCIROCCO-XL 100-2




SCIROCCO-XL 100-3




SCIROCCO-XL 100-4




SCIROCCO-XL 100-5




SCIROCCO-XL 100-2.2



SCIROCCO-XL 100-3.2



SCIROCCO-XL 100-4.2



SCIROCCO-XL 100-5.2


SCIROCCO-XL 100

Table-type condenser




DIMENSIONS

SCIROCCO-XL 100-1/2/3/4/5

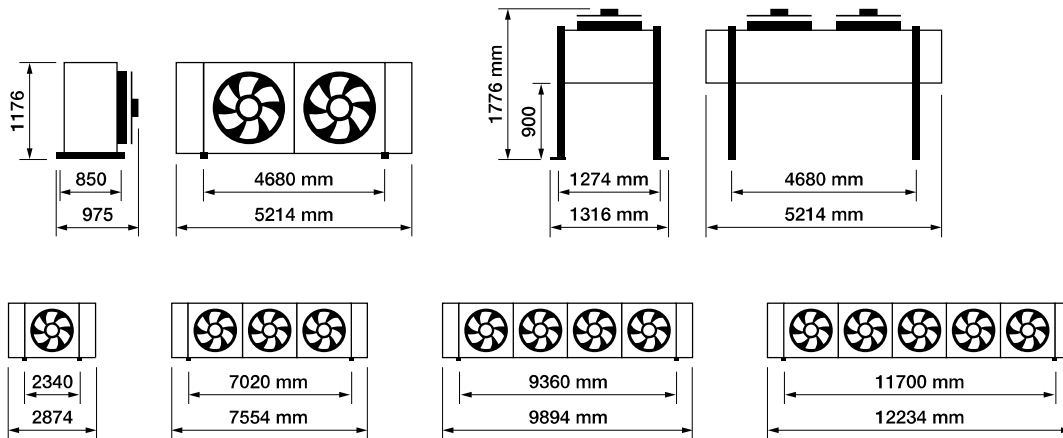

SCIROCCO-XL 100-2.2/3.2/4.2/5.2

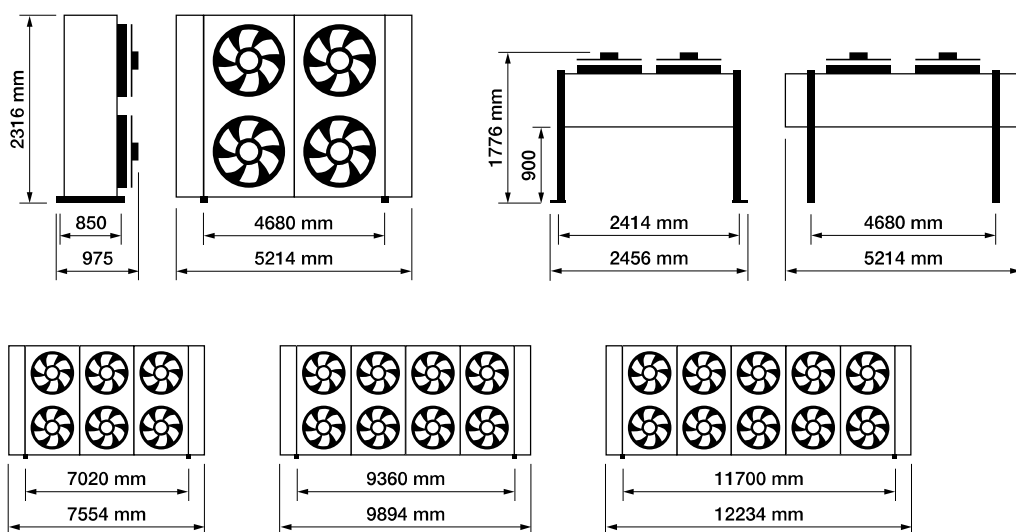

SELECTION CODE

SCIROCCO L C 100 2.2 B 4D EC H

SCIROCCO	table-type condenser
L	not present = std coil lenght L = L coil lenght XL = XL coil lenght
C	C = condenser CO₂ = gas cooler NH₃ = ammonia condenser W = dry cooler
100	fan size Ø 1000 mm

2.2	number of fans = 2 x 2 = 4
B	A - B - C = coil type
4D	4 = electric motor poles D - Y - S = motor type
EC	electronic motor if present
H	H = horizontal air flow V = vertical air flow

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.

SCIROCCO-XL 100



Table-type condenser

3 PH 6 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-XL C 100-1 B 6	108,3	186,1	27800	53	1x1	1000	930	2480	5,63	20	211	42,0	35
SCIROCCO-XL C 100-1 C 6	117,2	248,4	26300	53	1x1	1000	930	2480	5,63	26	231	54,0	42
SCIROCCO-XL C 100-2 B 6	217,1	372,5	55600	56	1x2	1000	930	4960	11,26	39	402	64,0	54
SCIROCCO-XL C 100-2 C 6	234,5	496,7	52650	56	1x2	1000	930	4960	11,26	52	442	76,0	64
SCIROCCO-XL C 100-3 B 6	322,6	558,8	83400	58	1x3	1000	930	7440	16,89	59	593	64,0	54
SCIROCCO-XL C 100-3 C 6	346,2	745,1	78950	58	1x3	1000	930	7440	16,89	78	654	76,0	64
SCIROCCO-XL C 100-4 B 6	434,4	745,1	111200	59	1x4	1000	930	9920	22,52	78	784	89,0	76
SCIROCCO-XL C 100-4 C 6	469,3	993,5	105250	59	1x4	1000	930	9920	22,52	104	865	89,0	76
SCIROCCO-XL C 100-5 B 6	542,9	931,4	139000	59	1x5	1000	930	12400	28,15	98	976	89,0	76
SCIROCCO-XL C 100-5 C 6	583,3	1241,8	131600	59	1x5	1000	930	12400	28,15	130	1076	89,0	64
SCIROCCO-XL C 100-2.2 B 6	434,2	745,1	111200	59	2x2	1000	930	9920	22,52	78	759	64,0	54
SCIROCCO-XL C 100-2.2 C 6	469,1	993,5	105250	59	2x2	1000	930	9920	22,52	104	839	76,0	64
SCIROCCO-XL C 100-3.2 B 6	645,2	1117,6	166800	60	2x3	1000	930	14880	33,78	117	1123	64,0	54
SCIROCCO-XL C 100-3.2 C 6	692,4	1490,2	157900	60	2x3	1000	930	14880	33,78	156	1243	76,0	64
SCIROCCO-XL C 100-4.2 B 6	868,8	1490,2	222400	61	2x4	1000	930	19840	45,04	156	1486	89,0	76
SCIROCCO-XL C 100-4.2 C 6	938,5	1986,9	210550	61	2x4	1000	930	19840	45,04	208	1646	89,0	76
SCIROCCO-XL C 100-5.2 B 6	1085,8	1862,7	278000	62	2x5	1000	930	24800	56,3	195	1850	89,0	76
SCIROCCO-XL C 100-5.2 C 6	1166,6	2483,7	263200	62	2x5	1000	930	24800	56,3	259	2051	89,0	76

3 PH 8 poles	CAPACITY	SURFACE	AIR FLOW	SOUND PRESSURE	N° FANS x DIAMETER	FAN Ø	FAN SPEED	POWER	CURRENT	VOLUME	WEIGHT	Ø IN	Ø OUT
	kW	m²	m³/h	dB(A) @ 5m	Nr. x Ø mm	Rpm	Rpm	W	A	lt	kg	mm	mm
SCIROCCO-XL C 100-1 A 8	79,6	124,2	22800	49	1x1	1000	670	770	2,28	13	191	28,0	22
SCIROCCO-XL C 100-1 B 8	92,4	186,1	21500	49	1x1	1000	670	770	2,28	20	211	42,0	35
SCIROCCO-XL C 100-1 C 8	95,8	248,4	20350	49	1x1	1000	670	770	2,28	26	231	54,0	42
SCIROCCO-XL C 100-2 A 8	159,4	248,4	45550	52	1x2	1000	670	1540	4,56	26	362	54,0	42
SCIROCCO-XL C 100-2 B 8	185,1	372,5	42950	52	1x2	1000	670	1540	4,56	39	402	64,0	54
SCIROCCO-XL C 100-2 C 8	191,8	496,7	40750	52	1x2	1000	670	1540	4,56	52	442	76,0	64
SCIROCCO-XL C 100-3 A 8	240,1	372,5	68350	54	1x3	1000	670	2310	6,84	39	533	54,0	42
SCIROCCO-XL C 100-3 B 8	275,4	558,8	64450	54	1x3	1000	670	2310	6,84	59	593	64,0	54
SCIROCCO-XL C 100-3 C 8	283,6	745,1	61100	54	1x3	1000	670	2310	6,84	78	654	76,0	64
SCIROCCO-XL C 100-4 A 8	319,0	496,7	91100	55	1x4	1000	670	3080	9,12	52	704	76,0	64
SCIROCCO-XL C 100-4 B 8	370,4	745,1	85900	55	1x4	1000	670	3080	9,12	78	784	89,0	76
SCIROCCO-XL C 100-4 C 8	383,6	993,5	81450	55	1x4	1000	670	3080	9,12	104	865	89,0	76
SCIROCCO-XL C 100-5 A 8	402,3	620,9	113900	55	1x5	1000	670	3850	11,4	65	876	76,0	64
SCIROCCO-XL C 100-5 B 8	462,8	931,4	107400	55	1x5	1000	670	3850	11,4	98	976	89,0	76
SCIROCCO-XL C 100-5 C 8	477,1	1241,8	101800	55	1x5	1000	670	3850	11,4	130	1076	89,0	64
SCIROCCO-XL C 100-2.2 A 8	318,8	496,7	91100	55	2x2	1000	670	3080	9,12	52	678	54,0	42
SCIROCCO-XL C 100-2.2 B 8	370,3	745,1	85900	55	2x2	1000	670	3080	9,12	78	759	64,0	54
SCIROCCO-XL C 100-2.2 C 8	383,5	993,5	81450	55	2x2	1000	670	3080	9,12	104	839	76,0	64
SCIROCCO-XL C 100-3.2 A 8	480,2	745,1	136650	56	2x3	1000	670	4620	13,68	78	1002	54,0	42
SCIROCCO-XL C 100-3.2 B 8	550,7	1117,6	128900	56	2x3	1000	670	4620	13,68	117	1123	64,0	54
SCIROCCO-XL C 100-3.2 C 8	567,2	1490,2	122200	56	2x3	1000	670	4620	13,68	156	1243	76,0	64
SCIROCCO-XL C 100-4.2 A 8	637,9	993,5	182200	57	2x4	1000	670	6160	18,24	104	1325	76,0	64
SCIROCCO-XL C 100-4.2 B 8	740,8	1490,2	171850	57	2x4	1000	670	6160	18,24	156	1486	89,0	76
SCIROCCO-XL C 100-4.2 C 8	767,3	1986,9	162900	57	2x4	1000	670	6160	18,24	208	1646	89,0	76
SCIROCCO-XL C 100-5.2 A 8	804,6	1241,8	227750	58	2x5	1000	670	7700	22,8	130	1649	76,0	64
SCIROCCO-XL C 100-5.2 B 8	925,5	1862,7	214800	58	2x5	1000	670	7700	22,8	195	1850	89,0	76
SCIROCCO-XL C 100-5.2 C 8	954,2	2483,7	203650	58	2x5	1000	670	7700	22,8	259	2051	89,0	76

Capacity: R404A Tc=40°C Ts=65°C Ta=25°C

© 2016 Stefani Spa. Data and images are indicative and may be changed in any time without notice.



CONFIGURATIONS

RANGE	MODELS	FANS		POLES	AVAILABLE ON REQUEST		
	Nr.	Nr.	Ø mm	Nr.			
SCIROCCO 35	20	1 ÷ 6	350	4 - 6	SYNTHETIC	CO ₂	NH ₃
SCIROCCO 50	63	1 ÷ 8	500	4 - 6 - 8			
SCIROCCO 63	84	1 ÷ 8	630	4 - 6 - 8 - 12			
SCIROCCO-L 63	60	1 ÷ 6	630	4 - 6 - 8 - 12			
SCIROCCO 80	60	1 ÷ 16	800	6 - 8			
SCIROCCO-L 80	50	1 ÷ 12	800	6 - 8			
SCIROCCO-L 90	90	1 ÷ 12	910	4 - 6 - 8 - 12			
SCIROCCO-XL 90	81	1 ÷ 10	910	4 - 6 - 8 - 12			
SCIROCCO-L 100	50	1 ÷ 12	990	6 - 8			
SCIROCCO-XL 100	45	1 ÷ 10	990	6 - 8			

Configuration on request

CO₂ - gas cooler only up to 6,5 m unit length.
NH₃ version only up to 12 m unit length.

RANGE	ACCESSORIES															
	INCREASED FIN SPACING	ALSI 304 CASING	SPECIAL RAL	CORROSION C5 CLASS	PREPAINTED FINS	COIL CATHODE TREATMENT	VIBRATION DUMPER	EC FANS	WIRING	POWER SWITCHES FOR FANS	SILENCER AX	SILENCER +	FAN SPEED CONTROLLER	DRAINABLE CIRCUIT	SPECIAL FEET HEIGHT	COIL EASY ACCESS
SCIROCCO 35	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO 50	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO 63	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO-L 63	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO 80	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO-L 80	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO-L 90	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO-XL 90	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO-L 100	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
SCIROCCO-XL 100	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

● Standard

○ Optional



SCIROCCO 35
SCIROCCO 50
SCIROCCO 63
SCIROCCO-L 63
SCIROCCO 80
SCIROCCO-L 80
SCIROCCO-L 90
SCIROCCO-XL 90
SCIROCCO-L 100
SCIROCCO-XL 100



Table-type condenser

© 2016 Stefani Spa. Rev 01 - 02/2019. Printed in Italy.



**Great products
for great customers**

Stefani Spa | Castegnero (VI) Italy | T. +39 0444 639999 | F. +39 0444 638240 | info@stefani-online.it | stefaniexchangers.com