


UEMT6170Z



**ENGINEERING CODE**  
594RA5312AA

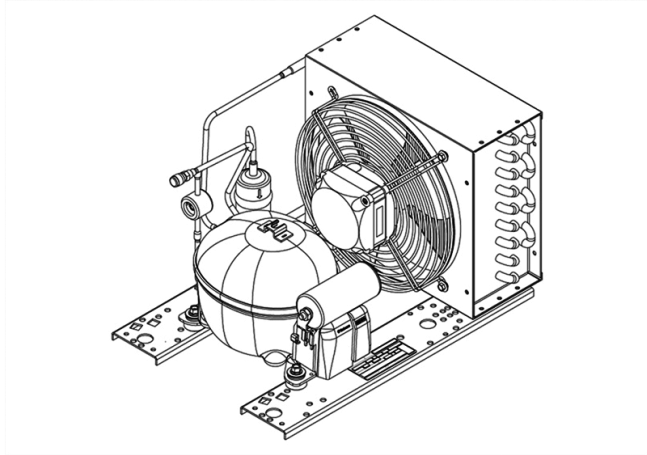

**POWER SUPPLY**  
220-240 V 50 Hz



**MOTOR TYPE**  
CSIR



**REFRIGERANT**  
R-134a



**APPLICATION**  
HBP



**STANDARD**  
EN13215\_RG20



**COOLING CAPACITY**  
433 W



**EFFICIENCY**  
1.66 W/W

CE

ECODESIGN COMPLIANT

DATA

GENERAL DATA

Model UEMT6170Z

CONDENSING COMPONENTS

Compressor	EMT6170Z	M/HBP
Condenser	3R9T	2451205
Refrigerant	R-134a	
Expansion Device	C-V	
Fan Blade Diameter	230	
Fankit	10W 230/31/5B	1996580

MECHANICAL DATA

Air Flow	420 m <sup>3</sup> /h
Height	254 mm
Shaft Power	10
Weight	15 Kg
Width	300 mm
Length	435 mm

## PERFORMANCE

### TESTED CONDITIONS

Tested Refrigerant	R-134a
Tested Application	HBP
Tested Standard	EN13215_RG20

### RATED POINTS

Ambient Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
32	-10	433	1.66	261

Test Condition: Subcooling 3 K, Return Gas 20 °C.

### PERFORMANCE CURVE

Ambient Temperature 25°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	365	1.58	231
-5	561	1.97	284
0	666	2.10	317
5	776	2.19	354
10	894	2.26	396

Test Condition: Subcooling 3 K, Return Gas 20 °C.

### PERFORMANCE CURVE

Ambient Temperature 32°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	351	1.48	238
-5	522	1.80	289
0	618	1.92	322
5	723	2.01	359
10	835	2.09	400

Test Condition: Subcooling 3 K, Return Gas 20 °C.


### PERFORMANCE CURVE

Ambient Temperature 43°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	284	1.15	247
-5	426	1.40	305
0	512	1.50	341
5	610	1.60	382

Test Condition: Subcooling 3 K, Return Gas 20 °C.

## ENVELOPE

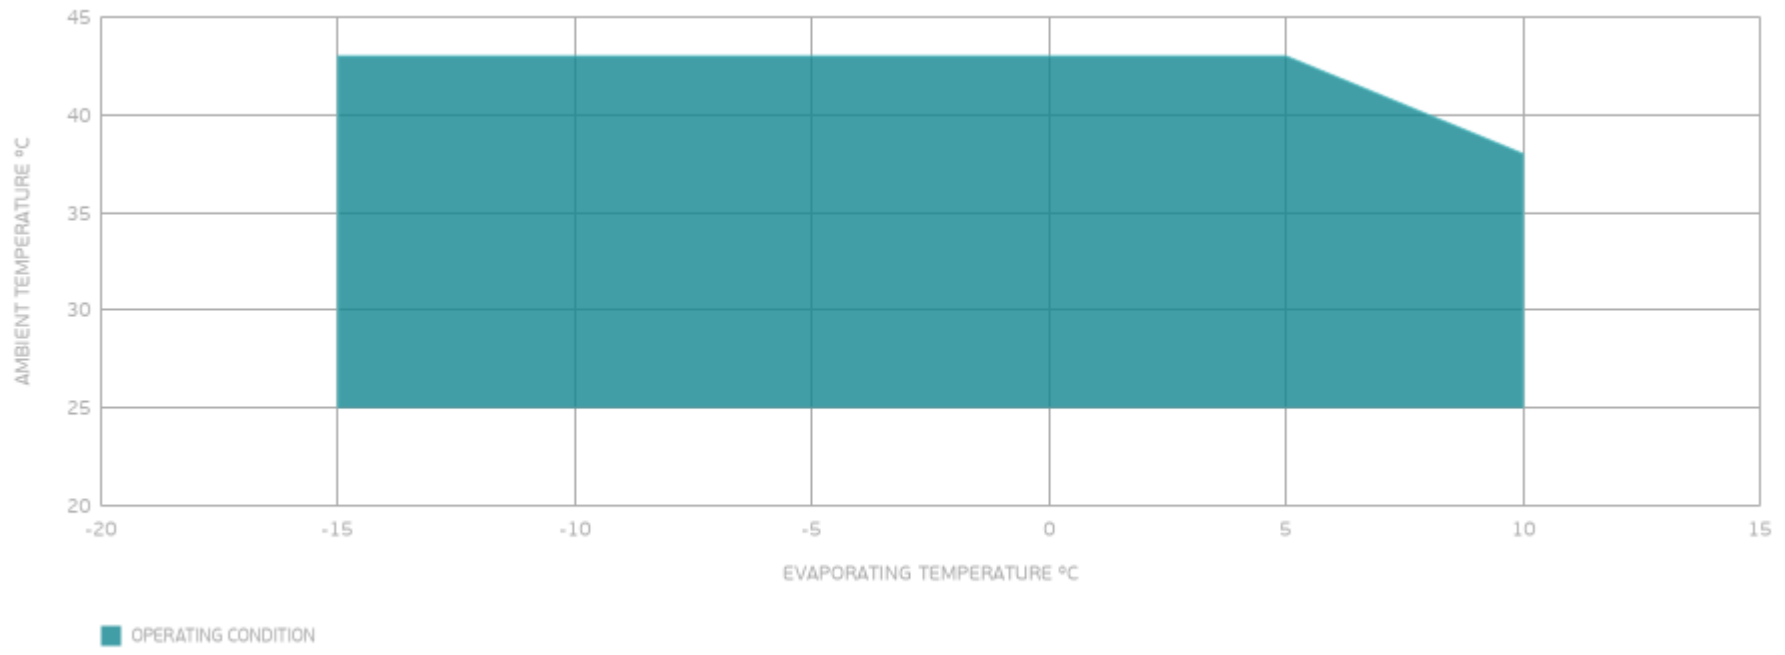

## EXTERNAL DIMENSIONS

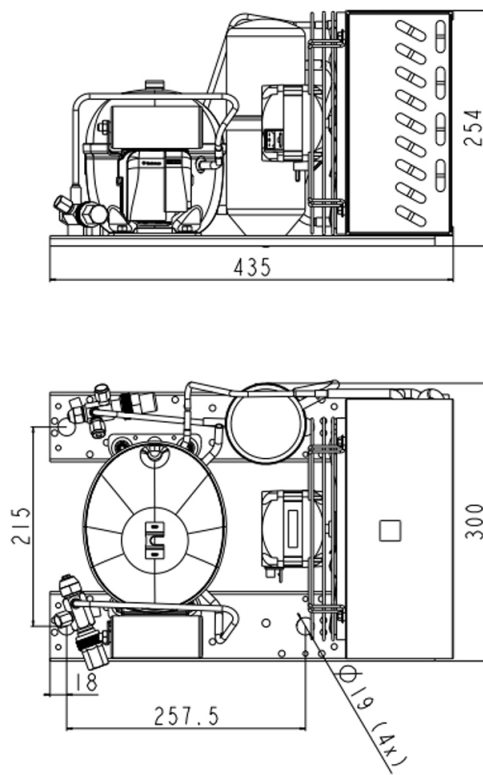

## WIRING DIAGRAM

