


UNIT	Axial fan motor
MOTOR	Single phase motor with capacitor
MOTOR TYPE	RW2-250 230V IMEVÄ
VOLTAGE (V)	230
FREQUENCY (Hz)	50
INPUT POWER (W)	90
CURRENT (A)	0.42
SPEED (r/min)	2400
AIR FLOW 20Pa (m³/h)	1310
NOISE (dBA)	60
CAPACITOR (µ F/450V)	3
ROTATION	CCW ,looking into the end-shield
INSULATION CLASS	B
MOTOR PROTECTION	Thermocontact 135±5°C
TEMPERATURE RISE	75K max
TYPE OF PROTECTION	IP54
OPERATING TYPE	S1
AMBIENT TEMPERATURE	-30°C +60°C
BEARINGS	Ball bearings
MOUNTING TYPE	Horizontal or Vertical
ELECTRICAL CONNECTION	Lead wire Silikon 4G 0.50mm² ,Length 100mm in terminal box connected
APPROVALS	CE
NET WEIGHT/GROSS WEIGHT	2.5/3.0kg
PACKING	29.0*29.0*16cm


LABEL :

REPOWER Axial Fan Motor
 RW2-250 230V IMEVÄ
 230V 50Hz 0.42A 51/90W 2400r/min
 3 µ F/450V CL.B XX/XX

WIRING DIAGRAM :

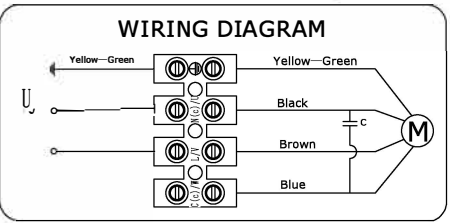

FLOW RATE CURVE :

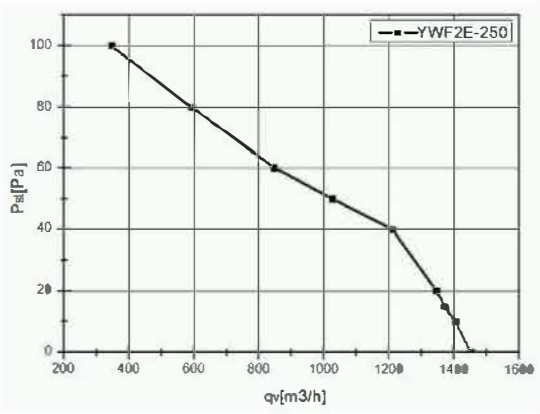

						SIGN	DATE	TITLE
						DRN. BY		RW2-250 230V IMEVÄ
						CHD. BY		
						ENG. BY		PROJECTION
REV.	DESCRIPTION	APPROVED	DATE			APP. BY		A4 SCALE SHEET: of