


LABEL :


REPOWER Axial Fan Motor
RW4-350 230V IMEVÄ
 230V 50Hz 0.65A 65/126W 1420r/min
 4 μ F/450V CL.B XX/XX

FLOW RATE CURVE :

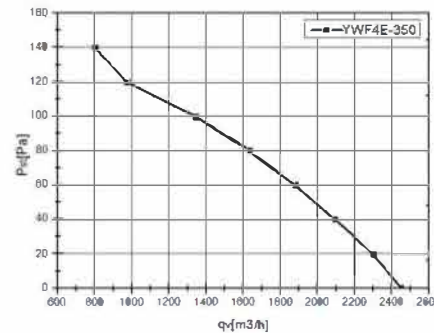

ErP2015 LABEL:
 ErP2015 (N40)
 N=41.23 η statA= 29.3%
 RW4-350 230V IMEVÄ

WIRING DIAGRAM :

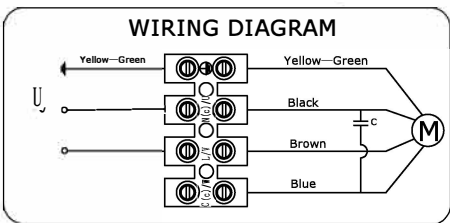

UNIT	Axial fan motor
MOTOR	Single phase motor with capacitor
MOTOR TYPE	RW4-350 230V IMEVÄ
VOLTAGE (V)	230
FREQUENCY (Hz)	50
INPUT POWER (W)	126
CURRENT (A)	0.65
SPEED (r/min)	1420
AIR FLOW (m³/h)	2300
NOISE (dBA)	64
CAPACITOR (μ F/450V)	4
ROTATION	CW ,looking into the end-shield
INSULATION CLASS	B
MOTOR PROTECTION	Thermocontact 135 \pm 5°C
TEMPERATURE RISE	75K max
PROTECTION CLASS	IP54
OPERATING TYPE	S1
AMBIENT TEMPERATURE	-30°C +60°C
BEARINGS	Ball bearings
MOUNTING TYPE	Horizontal or Vertical
ELECTRICAL CONNECTION	Lead wire Silikon 4G 0.50mm ² ,Length 100mm in terminal box connected (40.5mm ² 100mm)
APPROVALS	CCC, CE
NET WEIGHT/GROSS WEIGHT	5.0/6.0kg
PACKING	38.5*38.5*19cm

							SIGN	DATE	TITLE
							DRN. BY		RW4-350 230V IMEVÄ
							CHD. BY		
							ENG. BY		
							APP. BY		
REV.	DESCRIPTION	APPROVED	DATE						PROJECTION A4 SCALE SHEET: of