


UNIT	Axial fan motor
MOTOR	Single phases motor with capacitor
MOTOR TYPE	RW6-630 230V PUHALTAVA
VOLTAGE (V)	230
FREQUENCY (Hz)	50
INPUT POWER (W)	430
CURRENT (A)	2.35
SPEED (r/min)	930
AIR FLOW 20Pa (m³/h)	8990
NOISE (dBA)	71
CAPACITOR (µ F/450V)	12
ROTATION	CCW ,looking into the end-shield
INSULATION CLASS	B
MOTOR PROTECTION	Thermocontact 135±5°C
TEMPERATURE RISE	75K max
PROTECTION CLASS	IP54
OPERATING TYPE	S1
AMBIENT TEMPERATURE	-30°C +60°C
BEARINGS	Ball bearings
MOUNTING TYPE	Horizontal or Vertical
ELECTRICAL CONNECTION	Lead wire Silikon 4G 0.75mm² ,Length 100mm in terminal box connected (4.0.75mm² 100mm)
APPROVALS	CCC, CE
NET WEIGHT/GROSS WEIGHT	15.0/17.0kg
PACKING	67.0*67.0*25cm

LABEL :


**REFPOWER** Axial Fan Motor  
 RW6-630 230V PUHALTAVA  
 230V 50Hz 2.35A 250/430W 930r/min  
 12 µ F/450V CL.B XX/XX

FLOW RATE CURVE :

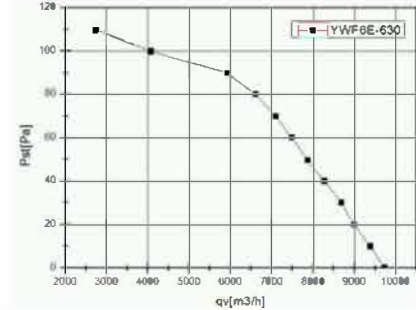

ErP2015 LABEL:  
 ErP2015 (N40)  
 N=42.55 η statA= 34.3%  
 RW6-630 230V PUHALTAVA

WIRING DIAGRAM :

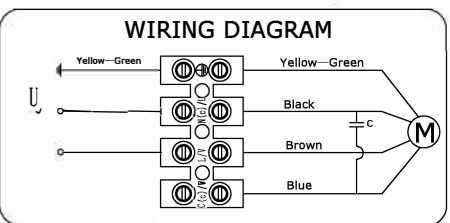

REV.	DESCRIPTION	APPROVED	DATE				SIGN	DATE	TITLE
							DRN. BY		RW6-630 230V PUHALTAVA
							CHD. BY		
							ENG. BY		
							APP. BY		
									PROJECTION
									A4
									SCALE
									SHEET: of